

# Cast Centerset Faucets 4" Centers

**TECK®**  
COMMERCIAL



## Specification: (example)

- **HEAVY DUTY CAST BRASS** centerset faucet
  - 102mm (4") centers, two handle
  - Polished chrome plated finish with polished underspout
  - Metal hold-down package
  - Color indexed metal handles with vandal resistant screws
  - **TUF-TECK®** compression structures
- and ... with ... (add product variation required)  
 with ... (add outlet required)  
 with ... (add handle required)  
 with ... (add suffix **-TI** if required – See Back Page)

**21T143**



**21T144**



## Engineer/Architect Approval


















Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.			
<b>4" Centerset Faucet</b>	<b>21T</b>			



PRODUCT VARIATION	OUTLET	HANDLE
<b>0</b> <input type="checkbox"/>	<b>0</b> <input type="checkbox"/>	<b>0</b> <input type="checkbox"/>
<b>1</b> Standard Product Less Pop-up (No Pop-up Hole)  <input type="checkbox"/>	<b>1</b> Vandal Resistant 1.9 USGPM (7.2 L/min.) Flow Control Rosespray  <input type="checkbox"/>	<b>1</b> Five Flute Handles  <input type="checkbox"/>
<b>2</b> Standard Product With <b>Metal</b> Pop-up  <input type="checkbox"/>	<b>2</b> Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Agion® Antimicrobial  <input type="checkbox"/>	<b>2</b> 102mm (4") Hooded Blade Handles (1)  <input type="checkbox"/>
<b>3</b> Standard Product with <b>Cast</b> Open Grid Strainer (No Pop-up Hole)  <input type="checkbox"/>	<b>3</b> Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator  <input type="checkbox"/>	<b>3</b> 76mm (3") Lever Blade Handles (1)  <input type="checkbox"/>
<b>4</b> Standard Product With <b>Cast</b> Offset Open Grid Strainer (No Pop-up Hole)  <input type="checkbox"/>	<b>4</b> Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator  <input type="checkbox"/>	<b>4</b> 102mm (4") Blade Handles, Sanitary Hoods (1)  <input type="checkbox"/>
<b>5</b> Standard Product With Chain Stay Less Plug & Chain  <input type="checkbox"/>	<b>5</b> Vandal Resistant 0.5 USGPM (1.9 L/min.) Flow Control Non-Aerating Spray Outlet  <input type="checkbox"/>	<b>5</b> 152mm (6") Wrist Handles, Sanitary Hoods  <input type="checkbox"/>
<b>6</b> <input type="checkbox"/>	<b>6</b> <input type="checkbox"/>	<b>6</b> <input type="checkbox"/>
<b>7</b> <input type="checkbox"/>	<b>7</b> <input type="checkbox"/>	<b>7</b> <input type="checkbox"/>
<b>8</b> <input type="checkbox"/>	<b>8</b> <input type="checkbox"/>	<b>8</b> 76mm (3") Self-Closing Lever Blade Handles  <input type="checkbox"/>
<b>9</b> <input type="checkbox"/>	<b>9</b> <input type="checkbox"/>	<b>9</b> Five Flute Self-Closing Handles  <input type="checkbox"/>


See Series 27T4 & 27T5 for 4" Gooseneck Spout Centersets. (1) H & C Temperature Indicator available. Add suffix **-TI**. Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Flow Rates are at 60 PSI. Note: Use this page front and back as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.


DSP-21T Rev. B

## Approvals:


- CSA certified
  - Complies to ASME A112.18.1
  - Lever Blade Handle No. 2, 3, 4 and 5, ADA Compliant and meet Handicapped  Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- (Contact Delta Representative for State and/or Local Approvals.)

## HANDLE TEMPERATURE INDICATORS

- ☐ Add suffix **"-TI"** to Product Number for handle temperature indicators "H" (red), "C" (blue). Available on handle options 2, 3 or 4 only.



## FLOW RATE vs PRESSURE

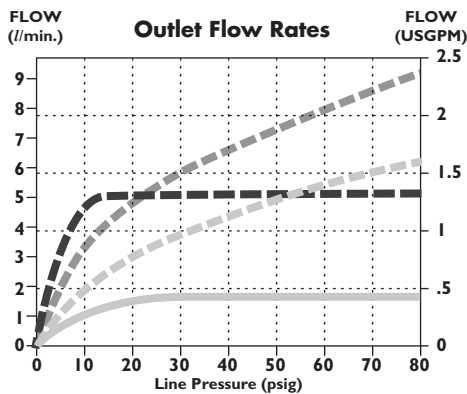

### Spout Outlets

- No. 1 Rose Spray
- No. 3 & 4 Aerator
- No. 2 Laminar Flow Outlet
- No. 5 Low Flow Outlet


CAST SPOUT OUTLET NO.	"D"	
	mm	in.
1	19	0.75
2	11	0.45
3	11	0.45
4	11	0.45
5	11	0.45

## INLETS - 1/2" MIP/Coupling Nuts


Note: Measurements may vary  $\pm 6$ mm (0.25")

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

## FRONT VIEW

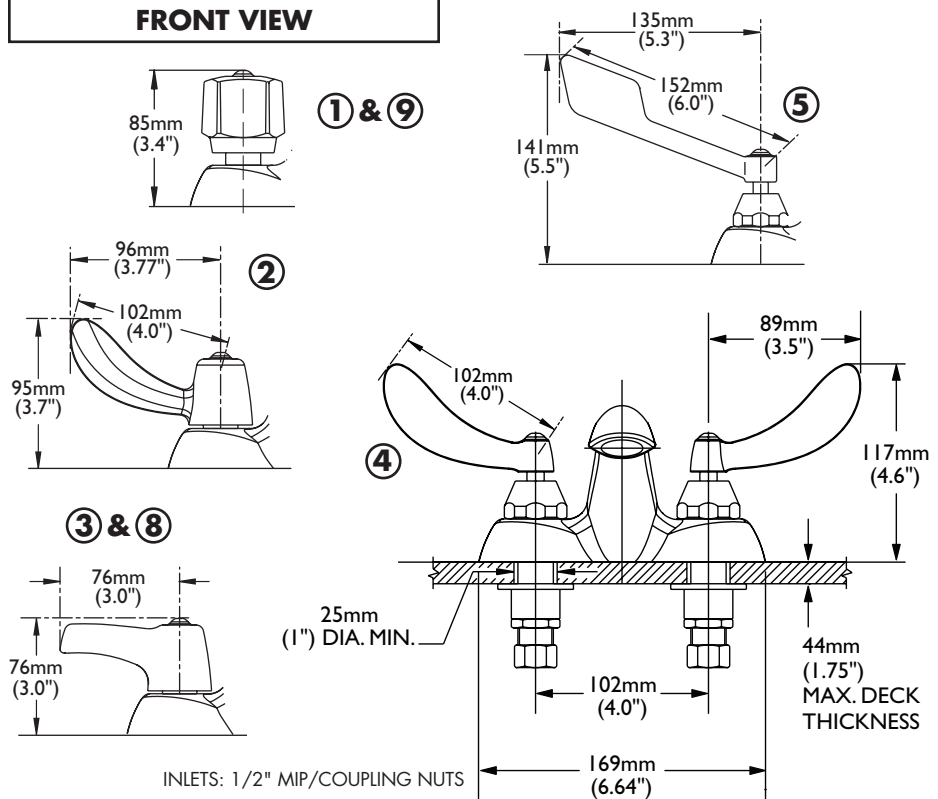


## SIDE VIEW

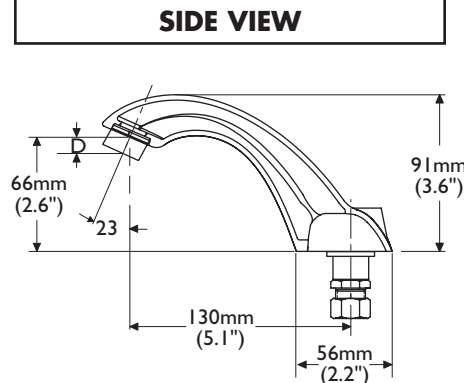


## METAL POP-UP

(supplied with Product Variation 2)

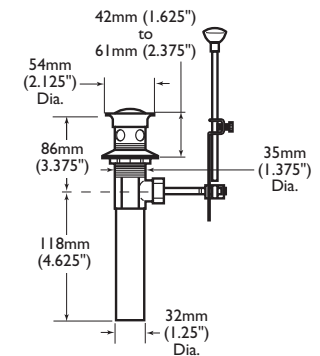


## OPEN GRID STRAINER

(supplied with Product Variation 3)

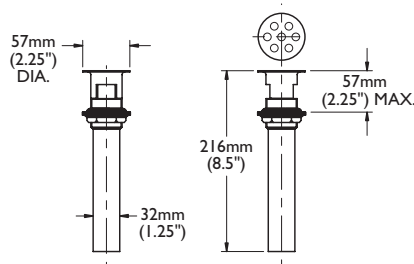

## OFFSET OPEN GRID STRAINER

(supplied with Product Variation 4)

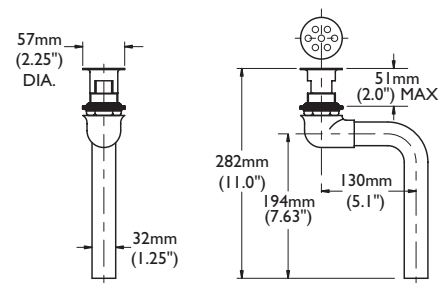

Note: Use this page front and back as a product submittal sheet.