

Cast Deckmount Sink Faucets 4" Centers

TECK®
COMMERCIAL



Specification: (example)

- **HEAVY DUTY CAST BRASS** sink faucet
 - 102mm (4") centers, two handle
 - Polished chrome plated finish
 - **BRASS** swing spout or 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
 - Metal hold-down package
 - Color indexed metal handles with vandal resistant screws
 - **CER-TECK®** 1/4 turn ceramic structures)
- and ... with ... Metal Pop-up (if applicable)
 with ... (add spout required)
 with ... (add outlet required)
 with ... (add handle required)
 with ... (add suffix **-LS** if required – See Back Page)
 with ... (add suffix **-TI** if required – See Back Page)

27C4834



27C4233



Engineer/Architect Approval

Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.
CAST Deckmount LESS Pop-up	27C4
CAST Deckmount WITH Pop-up	27C5



SPOUT	OUTLET	HANDLE
<div>0 <input type="checkbox"/></div> <div>1 203mm (8") Wallform (S2) Swing Spout (2) <input type="checkbox"/></div> <div>2 203mm (8") Tubular (S5) Swing Spout (2) <input type="checkbox"/></div> <div>3 152mm (6") Tubular (S3) Swing Spout (2) <input type="checkbox"/></div> <div>4 <input type="checkbox"/></div> <div>5 <input type="checkbox"/></div> <div>6 <input type="checkbox"/></div> <div>7 <input type="checkbox"/></div> <div>8 Heavy Duty 114mm (4 1/2") Bend Rigid/Swivel (R2) Gooseneck Spout (1) (4) <input type="checkbox"/></div> <div>9 Heavy Duty 152mm (6") Bend Rigid/Swivel (R4) Gooseneck Spout (1) (4) <input type="checkbox"/></div>	<div>0 <input type="checkbox"/></div> <div>1 <input type="checkbox"/></div> <div>2 Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Agion® Antimicrobial <input type="checkbox"/></div> <div>3 Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator <input type="checkbox"/></div> <div>4 Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator <input type="checkbox"/></div> <div>5 Vandal Resistant 0.5 USGPM (1.9 L/min.) Flow Control Non-Aerating Spray Outlet <input type="checkbox"/></div> <div>6 Hose Thread Outlet <input type="checkbox"/></div> <div>7 Smooth End, Laminar Flow Control in Base of Gooseneck Spout 1.1 USGPM (4.2 L/min.) (3) <input type="checkbox"/></div> <div>8 <input type="checkbox"/></div> <div>9 <input type="checkbox"/></div>	<div>0 <input type="checkbox"/></div> <div>1 Five Flute Handles <input type="checkbox"/></div> <div>2 102mm (4") Hooded Blade Handles (5) <input type="checkbox"/></div> <div>3 76mm (3") Lever Blade Handles (5) <input type="checkbox"/></div> <div>4 102mm (4") Blade Handles, Sanitary Hoods (5) <input type="checkbox"/></div> <div>5 152mm (6") Wrist Handles, Sanitary Hoods <input type="checkbox"/></div> <div>6 <input type="checkbox"/></div> <div>7 <input type="checkbox"/></div> <div>8 <input type="checkbox"/></div> <div>9 <input type="checkbox"/></div>

(1) Available **Optional Rigid/Swivel Spouts**. These spouts can ONLY be added to **SPOUT Option No. 9**.

(2) Available **Optional Swing Spouts**. These spouts can ONLY be added to **SPOUT Option No. 2**.

(3) This outlet can ONLY be added to **SPOUT Option No.'s 8 or 9**.

(4) 120° Limited Swing Spout available. Add Suffix **-LS**.

(5) H & C Temperature Indicator Available. Add Suffix **-TI**.

Note: Use this page front and back as a product submittal sheet.

Flow Rates are at 60 PSI.

Refer to www.specselect.com for individual models.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

CDSP-27C45 Rev. A


Approvals:

- CSA certified
 - Complies to ASME A112.18.1
 - Lever Handle No. 2, 3, 4, and 5
ADA Compliant and meets Handicapped
Accessibility Standard ASME A117.1
of less than 5 lbs. operating force.
- (Contact Delta Representative for State and/or
Local Approvals.)




HANDLE TEMPERATURE INDICATORS


- ☐ Add suffix **"-TI"** to Product Number for
handle temperature indicators "H" (red),
"C" (blue).
Available on handle options 2, 3 or 4 only.



FLOW RATE vs PRESSURE

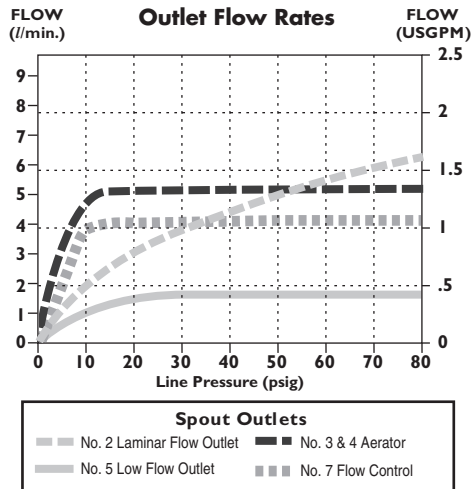


DECK FAUCET

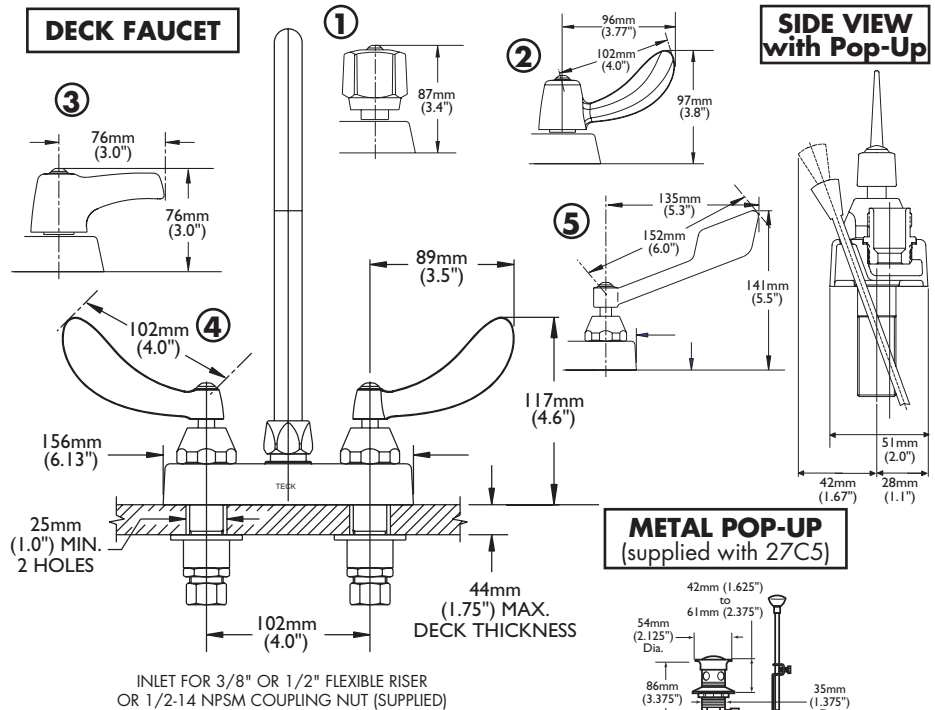

GOOSENECK SPOUTS

Outlets #2, 3, 4, 5, 6 Outlet #7

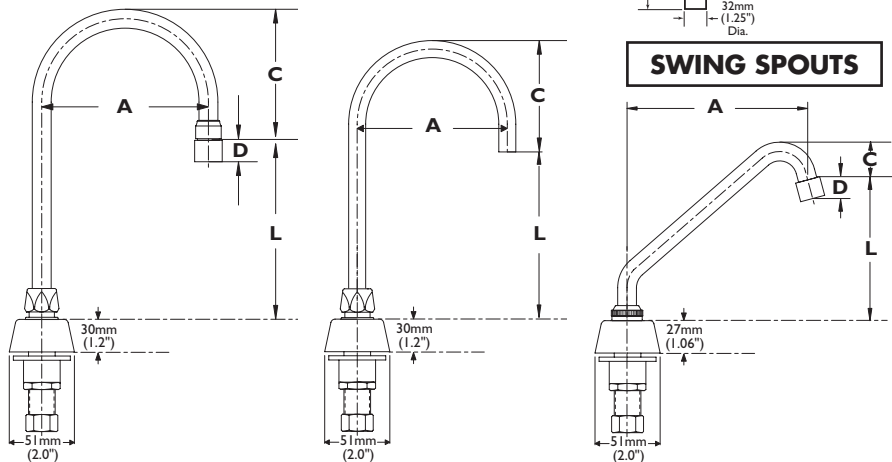

GOOSENECK SPOUT ASSEMBLY #8

SPOUT/OUTLET	"A"		"C"		"L"	
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R2) for outlets #2, 3, 4, 5, 6	114	4.5	104	4.1	170	6.7
Gooseneck-Standard (R2) for outlet #7	114	4.5	97	3.8	178	7.0

GOOSENECK SPOUT ASSEMBLY #9

SPOUT/OUTLET	"A"		"C"		"L"	
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R4) for outlets #2, 3, 4, 5, 6	152	6	124	4.9	146	5.8
Gooseneck-Standard (R4) for outlet #7	152	6	117	4.6	152	6.0

LIMITED SWING GOOSENECK

- ☐ Add suffix **"-LS"** to Product Number for
120° Limited Swing

SWING SPOUT ASSEMBLIES

SPOUT NO.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
1	8" Wallform Spout (S2)	206	8.1	15	0.6	130	5.1
2	8" Tubular Spout (S5)	185	7.3	41	1.6	147	5.8
3	6" Tubular Spout (S3)	140	5.5	38	1.5	107	4.2

FOR OPTIONAL RIGID/SWIVEL & LIMITED SWING SPOUTS

See DSP-R/S for detailed specification (Found in the
"Add-On Option" section when using the printed spec binder)

FOR OPTIONAL SWING SPOUTS

See DSP-S/S for detailed specification (Found in the
"Add-On Option" section when using the printed spec binder)

OUTLET NO.	"D"	
	mm	in.
2	18	0.69
3	18	0.69
4	17	0.67
5	18	0.69
6	17	0.67

INLETS - 1/2" MIP/Coupling Nuts Note: Measurements may vary ± 6 mm (0.25")