

GLENWALL® PRESSURE-ASSISTED TOILET

- 2093.100**
 - Vitreous china
 - Low-consumption (6.0 Lpf/1.6 gpf)
 - Wall-mounted, back-outlet toilet
 - Elongated bowl
 - Fully-glazed 2" ballpass trapway
 - 10" x 12" water surface area
 - Pressure-assisted siphon jet action
 - Side-mounted chrome trip lever
 - Close-coupled flushometer tank*
 - Speed Connect® tank/bowl coupling system
 - Sanitary bar on bowl

- 3402.016** Elongated bowl
- 4098.100** Tank complete with coupling components

Nominal Dimensions:

749 x 495 x 762 mm
(29-1/2" x 19-1/2" x 30")

Fixture only, seat and supply by others

Required working pressure range 25 psi - 80 psi


Alternate Configurations Available:

- 4098.700** Tank and tank cover only with tank cover locking device
- 4098.800** Tank and tank cover only with right hand trip lever

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 for Vitreous China Fixtures

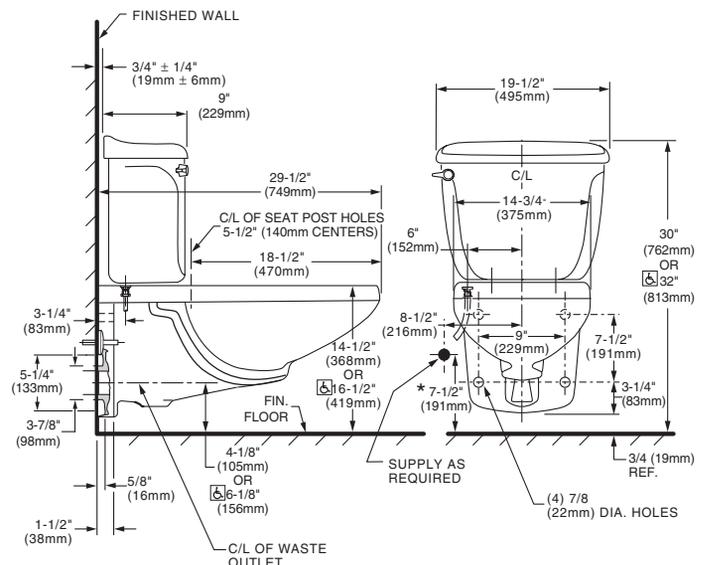

NOTES:
WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-FELT (WAX RING NOT RECOMMENDED)
 SUGGEST 1/16" CLEARANCE BETWEEN FACE AT WALL AND BACK OF BOWL.
 CARRIER FITTING AS REQUIRED TO BE FIGURED AND FURNISHED BY OTHERS.
 PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.
 SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
 * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
 FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

 When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor.
MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.

To Be Specified:

- Color: White Bone Linen
- Seat: American Standard #5901.100.020
- Supply with Stop:

* Flushmate III tank system by Flushmate® Div. of Sloan Valve Co