



DECORUM® 0.125 GPF HIGH EFFICIENCY URINAL

VITREOUS CHINA

DECORUM® 0.125 GPF HIGH EFFICIENCY URINAL

- Sleek, modern, compact vitreous china design
- Deep sump reduces splashing
- Washout urinal works at 0.125 gpf (0.47 Lpf)
- Permanent EverClean® surface inhibits the growth of stain and odor-causing bacteria, mold, and mildew on the surface
- 3/4" inlet spud with outlet connection threaded 2" inside (NPTF)
- Wall hangers included
- Fixture with strainer included
- ADA compliant
- Meets ANSI flush requirements at 0.125 GPF
- Meets California water savings regulations

- ☐ **6042.001EC** Top spud
- ☐ **6043.001EC** Back spud

Nominal Dimensions:

356 x 338 x 546mm
(14" x 13-5/16" x 21-1/2")

Recommended working pressure – between
20 psi at valve when flushing and 80 psi static

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures

To Be Specified:

- ☐ Color: ☐ White
- ☐ Flush Valve:
 - 0.125 gpf Flush Valve: Sensor-Operated:
 - ☐ American Standard Selectronic® #6063.013.002 DC Power (Top Spud)
 - ☐ American Standard Selectronic® #6062.301.007 AC Power (Back Spud)
 - 0.125 gpf Flush Valve: Manual-Operated:
 - ☐ American Standard #6045.013.002



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

EVERCLEAN®
Surface





Certified by
IAPMO R&T
When used with
0.125 gpf urinal
flush valves

[illegible]

Technical drawing of a toilet showing dimensions and components. The drawing includes the following labels and dimensions:

- 45mm (1-3/4")**: Dimension for the top rim.
- K2 HANGERS**: Label for the top rim hangers.
- 8mm X 25mm (5/16" X 1") SLOT**: Label for the slot in the top rim.
- 159mm (6-1/4")**: Dimension for the inner rim width.
- 483mm (19")**: Dimension for the total height.
- 547mm (21-1/2") REF.**: Dimension for the reference height.
- 387mm (15-1/4")**: Dimension for the height to the top of the bowl.
- 356mm (14")**: Dimension for the height to the top of the bowl (alternative measurement).
- 191mm (7-1/2")**: Dimension for the height to the bottom of the bowl.
- 432mm (17") MAX 610mm (24")**: Dimension for the height to the top of the bowl (alternative measurement).
- OPTIONAL**: Label for the optional feature.
- 338mm (13-5/16")**: Dimension for the width of the bowl.
- 102mm (4")**: Dimension for the width of the bowl.
- C/L OF OUTLET**: Label for the center line of the outlet.
- FINISHED FLOOR**: Label for the floor surface.
- FINISHED WALL**: Label for the wall surface.
- 3/4" SPUD**: Label for the spud connection.
- 13mm (1/2")**: Dimension for the wall thickness.
- 271mm (10-11/16")**: Dimension for the distance from the wall to the outlet.
- 2" N.P.T. FEMALE OUTLET CONNECTION**: Label for the outlet connection.

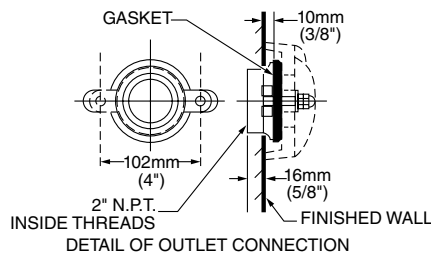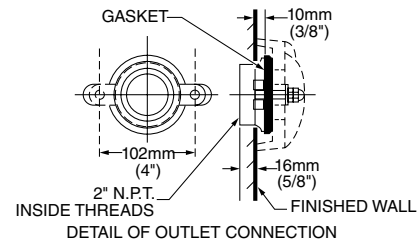

● When installed so top of rim is 432mm (17") from finished floor.