

Flush Valve for Washdown Urinals

TECK®
COMMERCIAL

DELTA®

SPECIFICATION: (example)

- **HEAVY-DUTY**, back inlet supply
 - **CAST BRASS** valve for 3/4" IP spud urinal
 - Polished chrome plated finish
 - Delta® slow close cartridge, factory set for 0.5 gallon (1.9 litres) flush
 - Chrome plated union inlet stop
 - Brass oscillating lever handle, coupling nuts, inlet cover tube
 - Set screw wall flange, spud flange, outlet tube
 - **1/2" universal FIP/copper sweat inlet**
- For Washdown Urinals**

□ **86T505** 



86T505

SPECIFICATION: (example)

- **HEAVY-DUTY**, back inlet supply
 - **CAST BRASS** valve for 3/4" IP spud urinal
 - Polished chrome plated finish
 - Delta® slow close cartridge, factory set for 0.5 gallon (1.9 litres) flush
 - Chrome plated brass coupling nuts, inlet cover tube
 - Wall flange, spud flange, outlet tube
 - **1/2" universal FIP/copper sweat inlet**
- For Washdown Urinals**

□ **86T500**

with vandal resistant brass push button

□ **86T502** 

with brass oscillating lever handle



86T500

SPECIFICATION: (example)

- **HEAVY-DUTY**, top inlet supply
 - **CAST BRASS** valve for 3/4" IP spud urinal
 - Polished chrome plated finish
 - Delta® slow close cartridge, factory set for 0.5 gallon (1.9 litres) flush
 - Chrome plated brass coupling nuts, spud flange, outlet tube
 - **1/2" universal FIP/copper sweat inlet**
- For Washdown Urinals**

□ **86T501**

with vandal resistant brass push button

□ **86T503** 

with brass oscillating lever handle



86T503

SPECIFICATION: (example)

Vacuum breaker assembly for above urinal valves

□ **86T610**



86T610

INSTALLATION WARNING:

Models supplied LESS vacuum breakers must be installed on fixtures providing sufficient air gap protection against backflow.

Engineer/Architect Approval

Model Specified:

Approval:

Date:




Approvals:

- IAPMO listed to CSA B125.3/ASSE 1037
- Lever Handle ADA Compliant and meets Handicapped Accessibility Standard ICC/ANSI A117.1 of less than 5 lbs. operating force.


(Contact Delta Representative for State and/or Local Approvals.)

Extensions Available for Inlet Centers and for Outlet Tube Heights

86T505

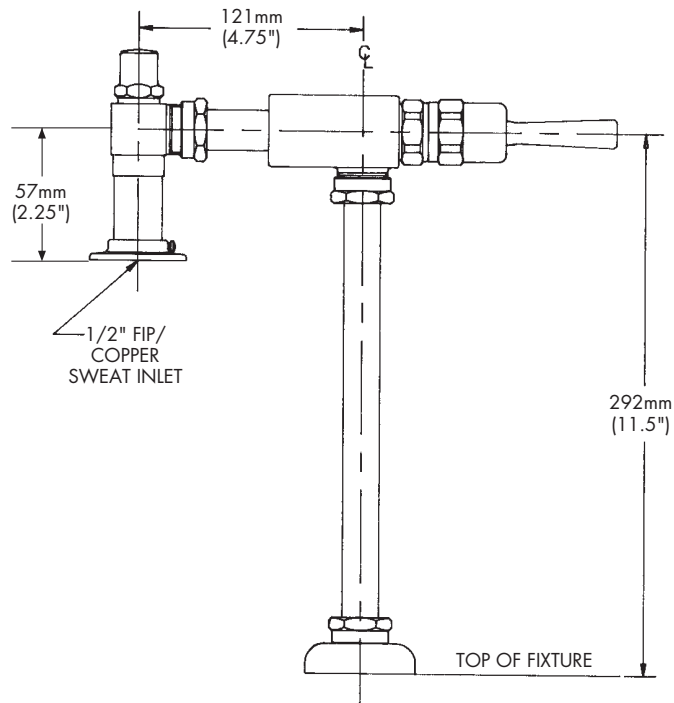

86T505 with 86T610

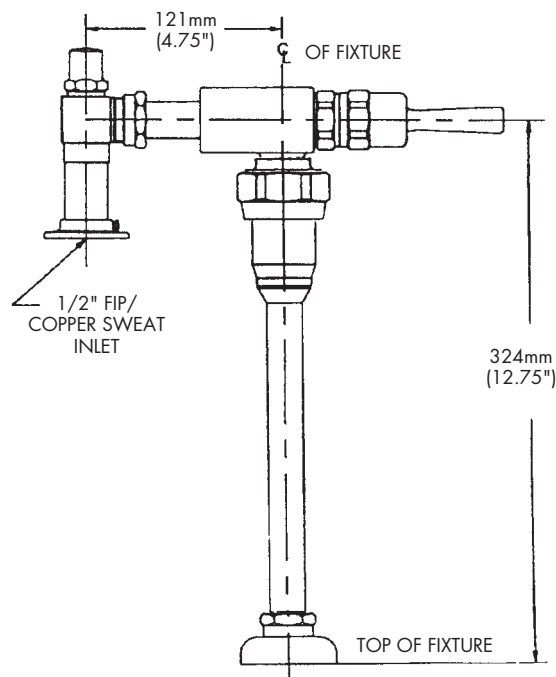

INLETS - 1/2" FIP/Copper

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.