


### MODELS QTXE090FLC, QTXE110FLC, QTXE150FLC QTXE SERIES - ULTRA SILENT™



Ultra-quiet, high performance bath fan / light with a modern-styled grille.

#### FEATURES

##### BLOWER:

- Plug-in, permanently lubricated motor - engineered for continuous operation
- Dynamically balanced centrifugal blower wheel for quiet, efficient performance
- Maintains a high percentage of rated CFM in less than ideal installations
- Low RPM for quiet operation
- Resilient anti-vibration motor mounts

##### HOUSING:

- Rugged, 26 gauge, galvanized steel construction
- 6" (152.4 mm) round ducting for superior performance
- New 6" duct connector ass'y with damper foam to avoid clatter
- 7-5/8" (193.7 mm) height allows for 2" x 8" (50.8 mm x 203.2 mm) (nominal) joist installations
- Sturdy, easy, four-point mounting directly to joist
- Includes unique spacer (patent pending) for mounting to engineered "I" joists
- Can be mounted in ceilings up to 12/12 pitch
- Hanger bars assembly included

##### GRILLE:

- Polymeric construction
- Innovative design - the result of extensive research with designers and consumers
- 26 W fluorescent lamp \* (bulb included) and 4 W night light (bulb not included)
- Durable steel reflector with white enamel finish

3-Year Warranty



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



#### TYPICAL SPECIFICATION

Ceiling Ventilator shall be Broan Model QTXE090FLC (QTXE110FLC) (QTXE150FLC).

Ceiling Ventilator shall have corrosion resistant galvanized steel housing with four-point mounting capability. It shall be ducted to a roof or wall cap using 6" (152.4 mm) round ductwork.

Blower assembly shall be removable, have a centrifugal-type blower wheel and a permanently lubricated motor designed for continuous operation and mounted with resilient anti-vibration mounts.

Non-metallic damper/duct connector shall be included.

Lamp shall be 26W fluorescent \* with separate 4W night light.

Air delivery shall be no less than 90 CFM (42.5 L/s), 110 CFM (51.9 L/s), 150 CFM (70.8 L/s) and sound level no greater than 0.6 (0.7) (1.4) Sones. All air and sound ratings shall be certified by HVI.

Ceiling ventilator shall be ENERGY STAR® qualified and have an energy efficient permanent split capacitor motor.

Ceiling Ventilator shall be UL and cUL Listed for use in insulated ceilings (Type I.C.) and for use over bathtubs and showers when connected to a GFCI protected branch circuit.

\* Use only with one of the following 26W fluorescent lamps:  
G.E. F26DBXT4/E/827 (Broan 99271311),  
G.E. F26DBXT4/SPX27, PANASONIC FQ26E27/2  
PHILLIPS PL-26W/827/ALTO, OSRAM/SYLVANIA  
CF26DD/827, NEMA Type CFQ26W/G24D/827

Broan-NuTone Canada Inc., Mississauga, Ontario, Canada L5T 1H9 (1-888-882-7626)


REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

# PERFORMANCE RATINGS

## QTXE SERIES - ULTRA SILENT™ VENTILATION FAN WITH FLUORESCENT LIGHT & NIGHT LIGHT

### HVI PERFORMANCE

Model	Sones @ 0.1" (2.5mm) SP	CFM (L/s) @ 0.1" (2.5 mm) SP	CFM (L/s) @ 0.25" (6.4mm) SP
QTXE090FLC	0.6	90 (42.5 L/s)	68 (32.1 L/s)
QTXE110FLC	0.7	110 (51.9 L/s)	94 (44.4 L/s)
QTXE150FLC	1.4	150 (70.8 L/s)	133 (62.8 L/s)

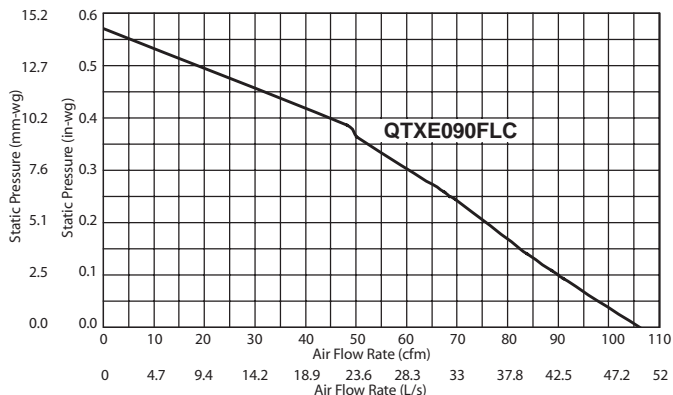

### AMPS & WATTS

Model	Amps ***	Watts Fan Only	Watts Fan/Light
QTXE090FLC	1.0	27	57
QTXE110FLC	1.1	36	66
QTXE150FLC	1.0	53	83

\*\*\* Total connected load

### WEIGHT

Model	Shipping Weight (kg)
QTXE090FLC	16.2 lbs. (7.3 kg)
QTXE110FLC	15.8 lbs. (7.2 kg)
QTXE150FLC	16.2 lbs. (7.3 kg)

