




SPECIFICATION SHEET

BP SERIES TWO-SPEED RANGE HOOD

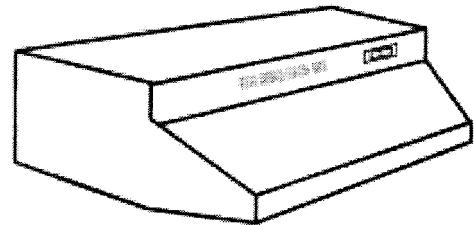

Designed with simplicity in mind, the Basic Performance Series range hood provides the high quality you expect and the value you demand.

FEATURES

- Contains rocker type fan and light switches
- Units may be installed in three (3) different configurations:
- 3 1/4" (82.6 mm) x 10" (254 mm) duct for either vertical or horizontal ducting
- 7" (177.8 mm) round duct for vertical ducting
- Not ducted - requires charcoal filter #FKM65 (purchase separately)
- Unit includes a 3 1/4" (82.6 mm) x 10" (254 mm) damper and adapter
- To utilise a 75W light with diffuser (bulb not included)
- Available in 30" (762 mm) [white, almond, black, and white with black trim], and 24" (609.6 mm) [almond and white with black trim]
- Dual speed fan blade motor
- Mitered sides and hemmed bottom for added safety

TYPICAL SPECIFICATION

The Range Hood shall be Broan BP Series.

It shall be available in 24" (609.6 mm) and 30" (762 mm) widths. The Range Hood shall be available in a white finish, almond finish, and white with black trim finish.

Unit shall have a built in back draft damper and be ducted to exterior of dwelling either horizontally or vertically or optionally not ducted with use of charcoal filter Model #FKM65 (purchase separately).

Unit shall have a two-speed fan switch and a separate light switch.

Sides of unit shall be mitered and bottom edged hemmed - with no sharp edges to insure customer safety.

Air delivery shall be no less than 180 CFM (85.0 L/s) and sound levels no greater than 7.5 Sones (vertical discharge). All air and sound ratings shall be certified by HVI. Units shall be cULus listed and CSA certified.



HVI-2100 CERTIFIED RATINGS comply with the new testing technologies and procedures prescribed by the Home Ventilation Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art laboratory. Sones are a measure of humanly produced loudness, based on laboratory measurements.




Broan-NuTone Canada Inc., Mississauga, Ontario, Canada L5T 1H9




REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

SPECIFICATIONS

VOLTS	AMPS	CFM (L/s)			SONES			DUCT (mm)
120	1.7	VER.	HOR.	ROUND	VER.	HOR.	ROUND	3-1/4" (82.6mm) x 10" (254mm) OR 7" (177.8mm) Round
		180 (85.0)	180 (85.0)	210 (99.1)	7.5	7.0	7.0	

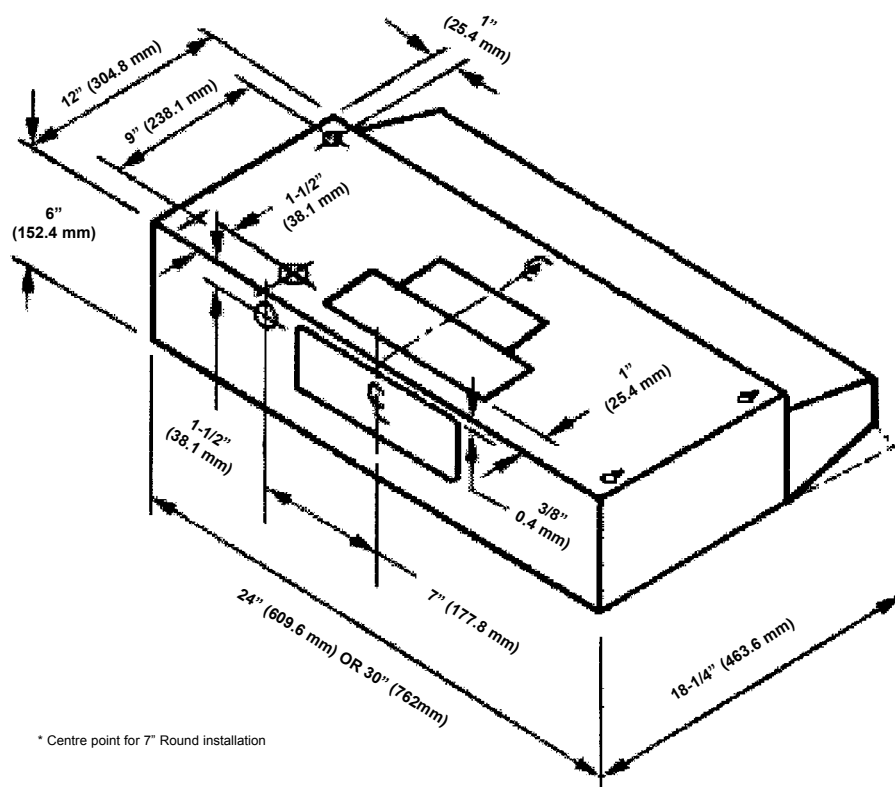

* Centre point for 7" Round installation

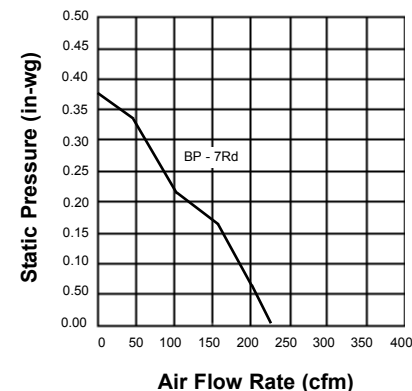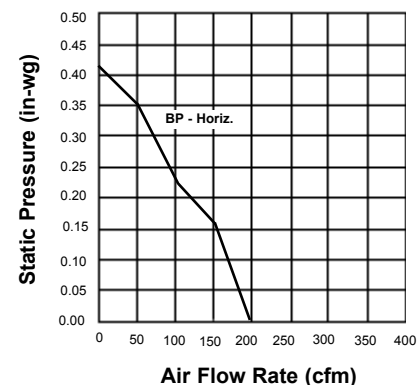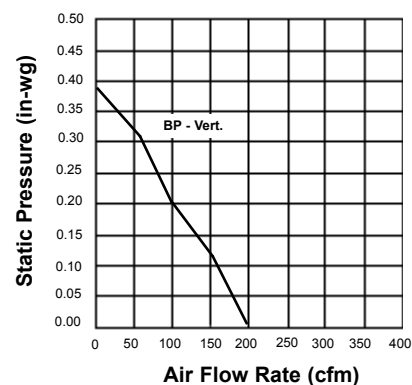

MODELS AVAILABLE

SIZE	WHITE	ALMOND	BLACK	WHITE W/ BLACK TRIM
24"	—	BP124ALN	—	BP124WHN
30"	BP130WWN	BP130ALN	BP130BLN	BP130WHN



HVI-2100 CERTIFIED RATINGS comply with the new testing technologies and procedures prescribed by the Home Ventilation Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art laboratory. Sones are a measure of humanly produced loudness, based on laboratory measurements.

