



**MODEL: CF50 BATHROOM EXHAUST FAN**

CF bathroom exhaust fans provide an economical bathroom ventilation solution. They are available as complete fan assemblies or in easy-to-install contractor packages. The built-in damper prevents a backdraft, keeping tempered air in a home when the fan is not operating.



<b>Model</b>	<b>CF50</b>
Air Volume (cfm @ 0.1" SP)	50
Noise (Sones)	3.5
Power Consumption (W)	51
Power Rating (V/Hz)	120V / 60 Hz
Duct Diameter (In.)	3

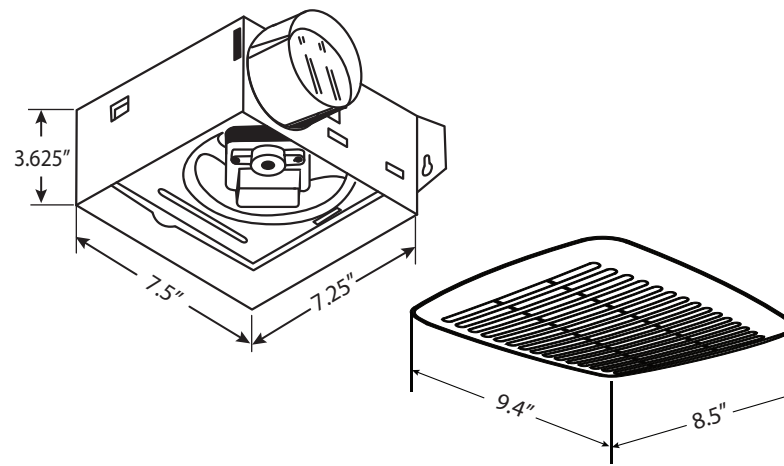

ETL In Process

**CONSTRUCTION**

- Galvanized steel housing
- Clean, simple grille design
- Double hanger mounting brackets adjust to 24" span
- Built-in backdraft damper

**MOTORS**

- Efficient AC motor
- Single phase
- 120V, 60 Hz
- Automatic reset thermal overload protection

PROJECT					ARCHITECT		
DATE					ENGINEER		
SUBMITTED BY					CONTRACTOR		
SPECIFICATION							
FAN NO.	MODEL NO.	CFM	VOLTS	WATTS	AMPS	QTY	OPTIONAL EQUIPMENT

**MODEL: CF70 BATHROOM EXHAUST FAN**

CF bathroom exhaust fans provide an economical bathroom ventilation solution. They are available as complete fan assemblies or in easy-to-install contractor packages. The built-in damper prevents a backdraft, keeping tempered air in a home when the fan is not operating.

	<table border="1"> <tr> <td><b>Model</b></td> <td><b>CF70</b></td> </tr> <tr> <td>Air Volume (cfm @ 0.1" SP)</td> <td>70</td> </tr> <tr> <td>Noise (Sones)</td> <td>3.5</td> </tr> <tr> <td>Power Consumption (W)</td> <td>63</td> </tr> <tr> <td>Power Rating (V/Hz)</td> <td>120V / 60 Hz</td> </tr> <tr> <td>Duct Diameter (In.)</td> <td>4</td> </tr> </table>	<b>Model</b>	<b>CF70</b>	Air Volume (cfm @ 0.1" SP)	70	Noise (Sones)	3.5	Power Consumption (W)	63	Power Rating (V/Hz)	120V / 60 Hz	Duct Diameter (In.)	4
<b>Model</b>	<b>CF70</b>												
Air Volume (cfm @ 0.1" SP)	70												
Noise (Sones)	3.5												
Power Consumption (W)	63												
Power Rating (V/Hz)	120V / 60 Hz												
Duct Diameter (In.)	4												

**CONSTRUCTION**

- Galvanized steel housing
- Clean, simple grille design
- Double hanger mounting brackets adjust to 24" span
- Built-in backdraft damper

**MOTORS**

- Efficient AC motor
- Single phase
- 120V, 60 Hz
- Automatic reset thermal overload protection

PROJECT					ARCHITECT		
DATE					ENGINEER		
SUBMITTED BY					CONTRACTOR		
SPECIFICATION							
FAN NO.	MODEL NO.	CFM	VOLTS	WATTS	AMPS	QTY	OPTIONAL EQUIPMENT