



Zephyrette & Zephyr Jr. (ZT & ZJ1)

› Zephyr (ZT & ZJ1) Features & Dimensional Data

- Quiet Operation: Low Sone Level, Non-Overloading Low Power Consumption Design
- Thermal Overload Protection Integral with Motor
- Rust Resistant, Durable Housing of Galvanized Steel
- UL Listed for UL705 and UL507
- AMCA Air Certified
- Lek-Trol™: Variable Speed Controller Can be Built into Fan Housing for Precise System Balancing and Energy Conservation



Ceiling Exhaust Fans

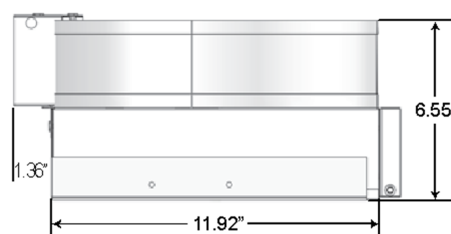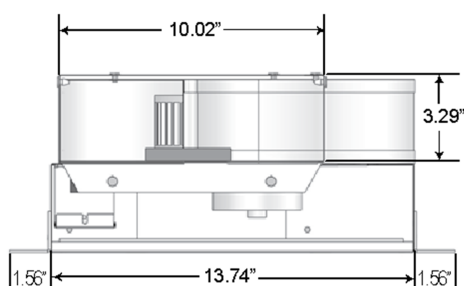

› Zephyr (ZT & ZJ1) Dimensional References and Performance Data

Model Number	Max Watts	Motor 60Hz AC	Motor RPM	Shipping Weight (lbs.)	SP	0.0"	.10"	.125"	.250"	.375"	.500"	.625"	.750"
ZT	48	115/1	1200	19	CFM	91	88	88	85	75	49	—	—
					SONES	1.8	2.2	2.3	2.8	3.0	3.2	—	—
					RPM	840	830	870	1115	1280	1460	—	—
ZJ1	125	115/1	1200	19	CFM	149	156	157	158	160	153	138	117
					SONES	2.0	2.3	2.4	3.0	3.4	3.4	3.5	3.5
					RPM	760	1000	1020	1150	1240	1360	1450	1520

Performance shown is for installation type A - Free inlet, Free outlet. Performance ratings include the effects of inlet grille and backdraft damper in the airstream. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5' (1.5m) in a hemispherical free field calculated per AMCA std. 301. Values shown are for installation Type A: free inlet fan sone levels. The AMCA Certified Ratings Seal applies to air performance ratings only.