CALI ONE PIECE TOILET 4.8LPF / 1.28GPF

□ 4710BOV □ 4710BOVU

Lined Tank Unlined Tank

PRODUCT SPECS:

- High efficiency toilet
- 4.8Lpf / 1.28Gpf
- Elongated bowl with concealed
- skirted trapway
- Vitreous china
- 17" Plus Height bowl
- Soft white tank lever
- 12" (305mm) Rough-in
- 2" Fully glazed ball pass trapway
- 3" Flapper
- Siphon jet flush action
- Water surface: 75%" x 55%"
- (198mm x 143mm)
- Floor bolts and decorative soft white side caps included
- Smooth close toilet seat included

DIMENSIONS:

392mm W x 725mm D x 765mm H 15½" W x 28½" D x 30½" H

COMPLIANCE CERTIFICATIONS

- Meets or exceeds the following:
- IAPMO cUPC - US EPA WaterSense
- ASME A 112.19.2 / CSA B45.1
- ANSI A117.1 ADA Guideline
- MaP Tested 1000g - LEED Compliant
- .

SHIPPING

Cube 9.39 GW 92.5 lbs




 ${\rm NOTES:}$ This toilet is designed to rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply

line not included with fixture and must be ordered separately.

Important: Dimensions of fixtures are nominal and may vary within the range of tolerances establishedby ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Products are designed to comply ADA/ANSI A117.1 Standard. It shall be the responsibility of the installer to comply with the local disability codes and standards prior to installing the product.

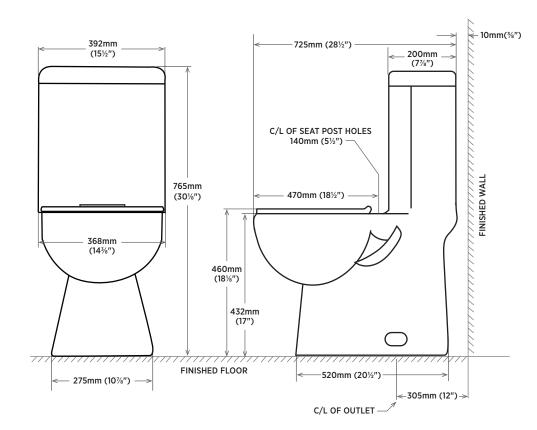

CONTRAC, CANADA 5970 CHEDWORTH WAY, UNIT B, MISSISSAUGA. ONTARIO, CANADA L5R 4G5 | CONTRAC.CA 6241 NORTHWIND PARKWAY, HOBART, INDIANA, USA 46342 | CONTRAC.US

REVISED OCTOBER 2019