







FLAT PANEL DEHUMIDIFIER

- Adjustable humidistat
- Bucket full indicator
- Automatic defrost control for colder rooms
- Comfort mode controls humidity based on room temperature
- Automatic shut-off when bucket is full
- Soft-touch electronic control panel

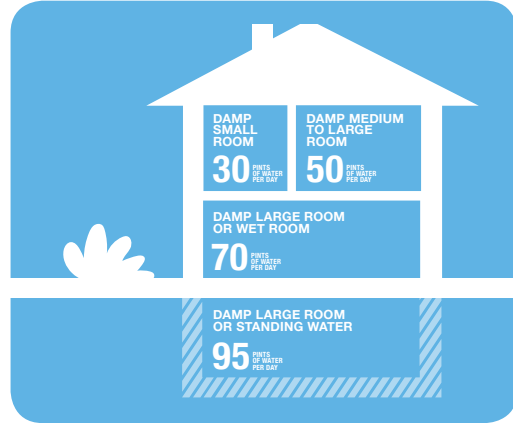

RESIDENTIAL

	1PFD22	1PFD35	1PFD50
CAPACITY (pts./Day)	22	35	50
COVERAGE (sq. ft.)	430	592	645
EER	1.57	1.8	2.0
FAN SPEEDS	2	2	2
AMPS	2.75	3.6	3.6
WATTS	1030	1675	1675
DECIBELS (Hi/Lo)	52/46.5	50/48	50/48
BUCKET CAPACITY (pts.)	6.3	12.7	12.7
UNIT DIMENSIONS (WxHxD) (in.)	15 ^{1/2} x 19 ^{3/4} x 10 ^{1/4}	15 ^{1/2} x 24 ^{1/4} x 11	15 ^{1/2} x 24 ^{1/4} x 11
PKG. DIMENSIONS (WxHxD) (in.)	16 ^{3/4} x 21 x 11 ^{3/4}	17 x 13 x 26	17 x 13 x 26
STUFFING QTY. (20'/40'/40' HQ)	432/880/1100	288/582/775	288/582/775
WEIGHT (Net/Gross) (lbs.)	33/35	41/44	41/44
MIN. OPERATING TEMP	41°F	41°F	41°F
REFRIGERATION	R410A	R410A	R410A
OUTLET CONFIGURATION	 15 AMP 115V	 15 AMP 115V	 15 AMP 115V