


Submitted Model No.: _____

Specific Features: _____



▲ Designate proper finish suffix

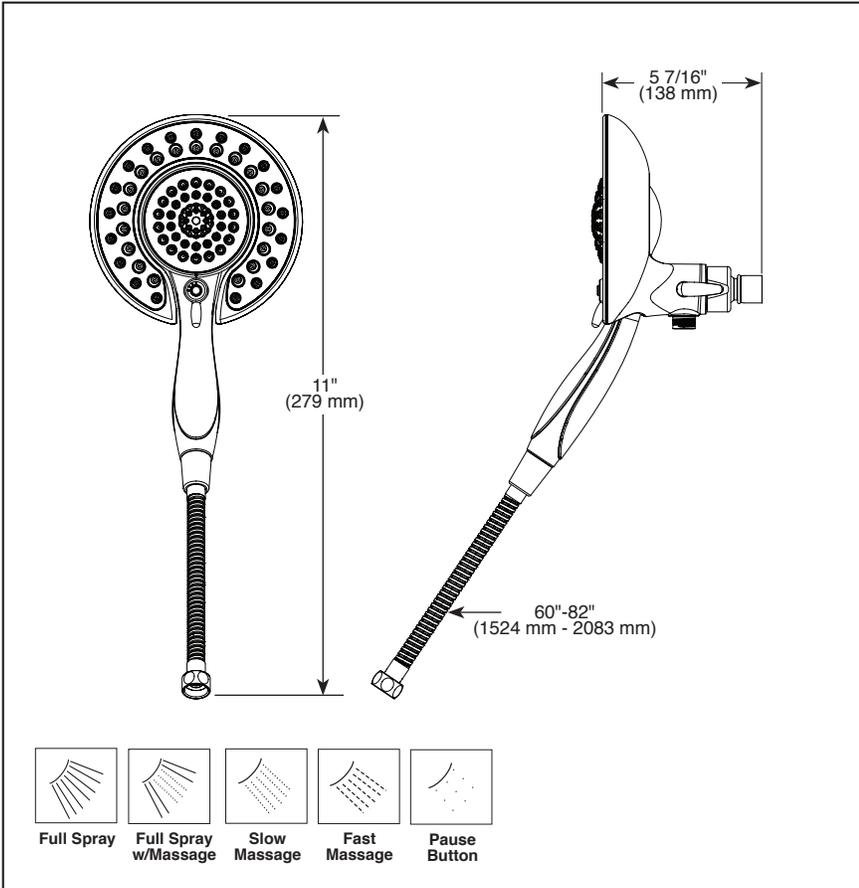

IN2ITION®

- 2-In-1 Shower
- Certified Dual Check Valves

STANDARD SPECIFICATIONS:

- Maximum 2.00 gpm @ 80 psi, 7.60 L/min @ 550 kPa.
- Integrated handshower docks securely into showerhead when not in use.
- Multiple handshower spray settings and pause feature.
- 60"-82" (1524 mm - 2083 mm) metal hose.
- Hand held shower with 5 spray settings - not a positive shut-off.
- Adjustable shower arm mounting hands-free showering.
- Diverter allows for single or shared operation of showerhead and handshower.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®



55 E 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2016 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-58569-PK Rev. B