



The **20 000 HOUR SERIES** is another alternative by STANDARD for an eco-friendly lighting solution.

The 20 000 hour lamps feature an exceptionally strong multi-support filament construction, which withstands heat, vibration and power surges.

These lamps are designed to last longer than general or extended service incandescent lamps. Due to a built-in heat shield the heat is kept away from the base, ensuring longer lamp life.

Features


- 20 000 hours average life
- For indoor and outdoor* use
- All "A" and reflector shaped lamps are equipped with a heat shield that provides even heat distribution and directs light forward out of the fixture

Applications

- Residential
- Retail stores
- Restaurants
- Decorative lighting
- Hotels
- High ceilings
- Office buildings
- Track lighting

Benefits

- Last up to 20 times longer than traditional incandescent lamps
- Reduced maintenance costs: eliminates up to 20 lamp replacements
- Suitable for rough service applications

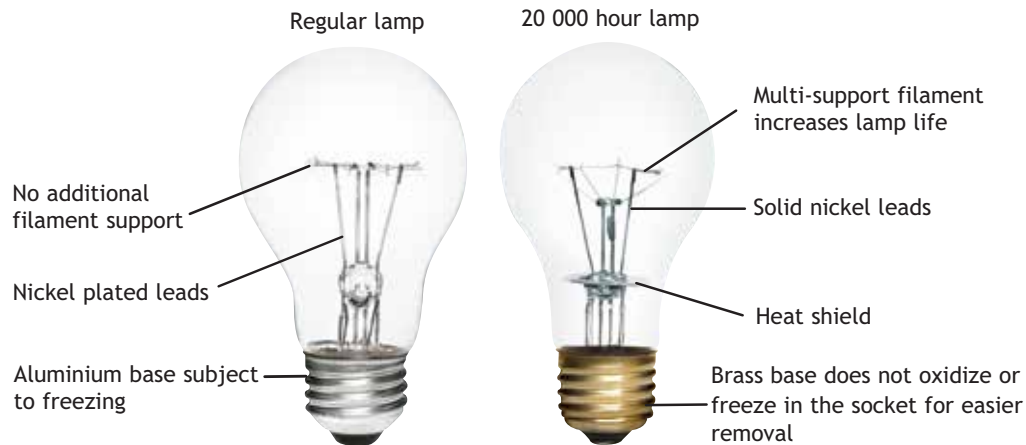

* For outdoor use where not directly exposed to the elements: should be shielded against direct moisture contact.



Order code	Description	Watts (W)	Base	Volts (V)	Finish/ Colour	Average life (hrs)	Filament	Initial lumens (lm)	MOL (in.) (mm)		LCL (in.) (mm)		Case qty
A15													
10263	30A15/CL/20M/120V/STD	30	E26	120	Clear	20000	C-9/4	175	3.5	89	3.0	76	120
14615	30A15/F/20M/120V	30	E26	120	Frost	20000	C-11	175	3.5	89	3.0	76	120
A19													
51121	25A19/CL/20M/120V/STD	25	E26	120	Clear	20000	C-9/4	105	4.3	108	3.0	76	120
10160	25A19/F/20M/120V/STD	25	E26	120	Frost	20000	C-9/4	105	4.3	108	3.0	76	120
10161	40A19/CL/20M/120V/STD	40	E26	120	Clear	20000	C-9/4	200	4.3	108	3.0	76	120
10162	40A19/F/20M/120V/STD	40	E26	120	Frost	20000	C-9/4	200	4.3	108	3.0	76	120
10163	60A19/CL/20M/120V/STD	60	E26	120	Clear	20000	C-9/5	440	4.3	108	3.0	76	120
10164	60A19/F/20M/120V/STD	60	E26	120	Frost	20000	C-9/5	440	4.3	108	3.0	76	120
10165	100A19/CL/20M/120V/STD	100	E26	120	Clear	20000	C-9/5	800	4.3	108	3.0	76	120
10166	100A19/F/20M/120V/STD	100	E26	120	Frost	20000	C-9/5	800	4.3	108	3.0	76	120
A21													
10327	100A21/F/20M/120V/STD	100	E26	120	Frost	20000	C-9/5	800	5.3	135	3.5	89	120
14616	135A21CL/20M/120V-USA	135	E26	120	Clear	20000	C-9	1300	5.3	135	3.8	98	120
10264	150A21/CL/20M/120V/STD	150	E26	120	Clear	20000	C-9/5	1300	5.3	135	3.5	89	120
10265	150A21/F/20M/120V/STD	150	E26	120	Frost	20000	C-9/5	1300	5.3	135	3.5	89	120
A23													
10262	200A23/F/20M/120V/STD	200	E26	120	Frost	20000	C-9/5	1800	6.2	157	5.0	127	60
BR30													
59235	65BR30/FL/20M/120V/STD	65	E26	120	Clear	20000	C-9/5	340	5.1	130	4.0	101	60
BR38													
[†] 10260	75BR38/FL/20M/120V/STD	75	E26	120	Clear	20000	C-9/5	400	5.8	147	3.3	84	12
[†] 59233	120BR38/FL/20M/120V/STD	120	E26	120	Clear	20000	CC-9/3	960	5.8	147	3.3	84	12
BR40													
[†] 10258	120BR40/FL/20M/120V/STD	120	E26	120	Clear	20000	C-9/5M	1000	6.6	167	4.3	108	24
ER30													
14609	50ER30/SP/20M/120V/STD	50	E26	120	Clear	20000	C-9/5	450	6.3	159	3.2	80	30
14612	75ER30/SP/20M/120V	75	E26	120	Clear	20000	C-11	750	6.1	155	3.2	80	30
G25													
14598	40G25/CL/20M/120V	40	E26	120	Clear	20000	C-11	320	4.5	114	2.9	73	60
G40													
14606	25G40/CL/20M/120V	25	E26	120	Clear	20000	C-11	190	6.9	176	4.4	111	24
14605	40G40/WH/20M/120V/STD	40	E26	120	White	20000	C-9/5	320	6.9	176	4.4	111	24
R20													
14601	30R20/SP/20M/120V	30	E26	120	Clear	20000	C-11	195	3.8	98	3.0	76	60
[†] 10256	50R20/SP/20M/120V/STD	50	E26	120	Clear	20000	C-9/5	400	3.9	99	3.0	76	200
S14													
10259	10S14/CL/20M/120V/STD	10	E26	120	Clear	20000	C-9/5	50	3.5	89	2.5	63	120
14608	11S14/F/20M/120V	11	E26	120	Frost	20000	C-11	70	3.3	84	2.5	63	120
14613	15S14/CL/20M/120V	15	E26	120	Clear	20000	C-11	88	3.3	84	2.5	63	120

¹This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.