


LRCB Series - LED Center Basket luminaires

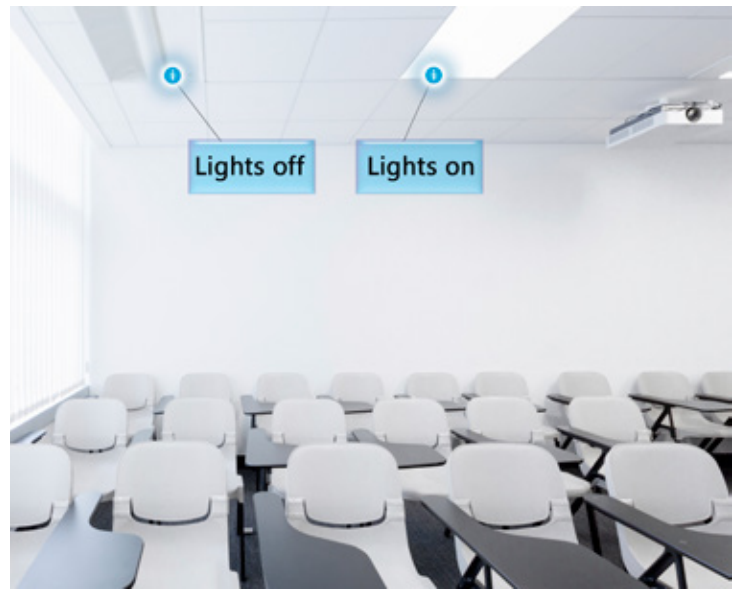

Now is the time to modernize your space

Ensure evenly distributed light that eliminates surface shadows and providing a glare-free environment.

CHARACTERISTICS

- ▶ Available in 120-277 V
- ▶ 3 500 K, 4 000 K & 5000
- ▶ 2' x 2', 1' x 4' & 2' x 4'
- ▶ 36 W, 42 W & 68 W
- ▶ Power factor of ≥ 0.99 , and low THD $\leq 20\%$
- ▶ CRI 80
- ▶ Polycarbonate diffuser
- ▶ Energy Efficient
- ▶ 0-10 V Dimming
- ▶ Operating temperature: -20°C to 60°C




STANDARD's LRCB series are direct/indirect center-diffuser luminaires that provide an optimal alternative to traditional fluorescent recessed luminaires. Easy to install into any T-grid applications. You can now modernize your areas and enjoy the benefit of a quality lightning solution.

This series provides an excellent option to the lighting designer or building Management Company seeking a pleasing aesthetic look, while providing substantial energy savings. Their modern sleek look provides smooth and visually comfortable lighting and is the perfect fit for any commercial or institutional applications, schools, hospitals or retail spaces


LRCB Series




Order code	Description	Watts (W)	Size	Volts (V)	Beam angle (°)	Colour temp. (K)	CRI	Average life (hrs)	Initial lumens (lm)
64082	LRCB/1X4/120-277V-DIM/36W/35K/STD	36	1' x 4'	120-277	120	3 500	84	50 000	3 441
64083	LRCB/1X4/120-277V-DIM/36W/40K/STD	36	1' x 4'	120-277	120	4 000	84	50 000	3 510
64084	LRCB/1X4/120-277V-DIM/36W/50K/STD	36	1' x 4'	120-277	120	5 000	84	50 000	3 702
64085	LRCB/2X2/120-277V-DIM/36W/35K/STD	36	2' x 2'	120-277	120	3 500	84	50 000	3 441
64086	LRCB/2X2/120-277V-DIM/36W/40K/STD	36	2' x 2'	120-277	120	4 000	84	50 000	3 510
64087	LRCB/2X2/120-277V-DIM/36W/50K/STD	36	2' x 2'	120-277	120	5 000	84	50 000	3 563
64088	LRCB/2X4/120-277V-DIM/42W/35K/STD	42	2' x 4'	120-277	120	3 500	84	50 000	4 389
64089	LRCB/2X4/120-277V-DIM/42W/40K/STD	42	2' x 4'	120-277	120	4 000	84	50 000	4 410
64090	LRCB/2X4/120-277V-DIM/42W/50K/STD	42	2' x 4'	120-277	120	5 000	84	50 000	4 505
64091	LRCB/2X4/120-277V-DIM/68W/35K/STD	68	2' x 4'	120-277	120	3 500	84	50 000	6 630
64092	LRCB/2X4/120-277V-DIM/68W/40K/STD	68	2' x 4'	120-277	120	4 000	84	50 000	6 804
64093	LRCB/2X4/120-277V-DIM/68W/50K/STD	68	2' x 4'	120-277	120	5 000	84	50 000	7 073



2' x 2'

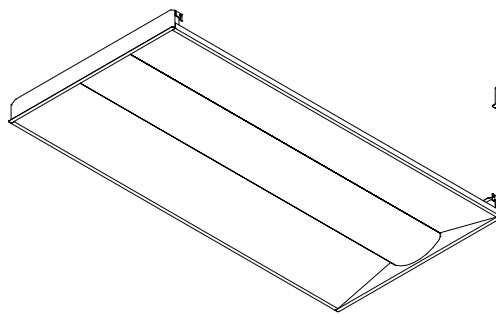

2' x 4'

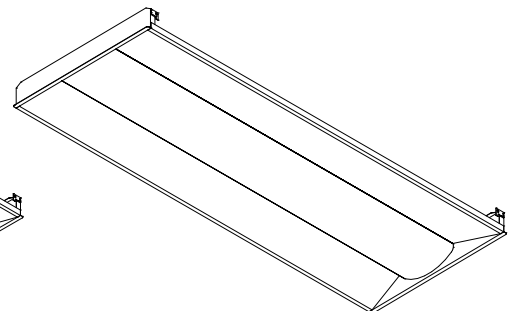

1' x 4'

