

# TECHNICAL INFORMATION BULLETIN

## LED RETROFIT LAMPS

### ORDERING INFORMATION

Order code: 62430  
 Description: LED/GU10/6W/NFL/30K/25/D/ELUME  
 UPC: 69549624306  
 Case quantity: 48


### PERFORMANCE DATA

Initial lumens (lm)\*: 340  
 Initial lumens per watt (lm/W): 53  
 Wattage (W): 6  
 Lamp voltage (VAC): 120  
 Colour temperature (K)\*\*: 3 000  
 CRI: 82  
 Average life (hours)<sup>1</sup>: 25 000  
 CBCP (cd): 1 100  
 Power factor: 0.6  
 Operating temperature range: -20 °C/4 °F to 50 °C/122 °F  
 Dimmable range: 10%-100%  
 Environment: Damp location

<sup>1</sup>L70 = 25 000 hours

\* Initial lumens range +/- 5%

\*\* Typical colour temperature range +/- 5%

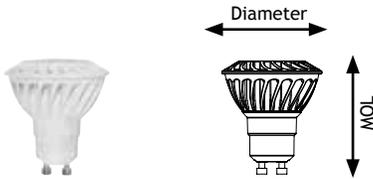

MOL = 2 1/4 in. (57 mm)  
 Dia. = 1 31/32 in. (50 mm)




### COMPATIBLE DIMMER LIST

**LUTRON DIMMERS:** S-600, DV-600P, LG-600, DV-603, GL-600, DNG-600, S-603, AY-600, TG-600, O-600, NTLV-600, SLV-600, NTELV-600, SELV-300, DVELV-300.

**OTHER DIMMERS:** Leviton IPI 06, 6161, RTD01, 6633P, 6684, RPI 06, 6615P, 6681, 6631; Panasonic NQ20345, WN575259.

### BEAM SPREAD

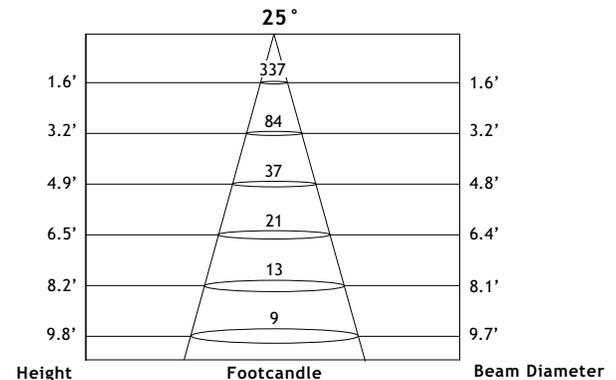

### CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock - do not use where directly exposed to water or weather.
- Suitable for use in open fixtures.
- Suitable for use in damp locations.
- Do not open - no user serviceable parts inside.
- Added weight of the device may cause instability of a freestanding portable luminaire. Use in portable table lamps in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- Three year limited warranty.
- For complete dimmer compatibility and warranty information visit [www.standardpro.com](http://www.standardpro.com).
- Operating temperature: -20 °C/4 °F to 50 °C/122 °F.
- NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.