


Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

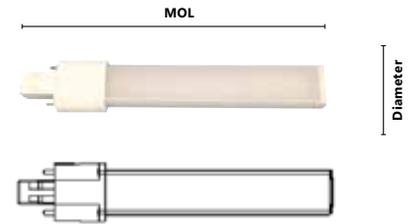


MOL : 7 3/32 in. (180.5 mm)    Dia. : 1 5/16 in. (33 mm)

## ORDERING INFORMATION

Order code: 65366  
 Description: LED/PLV-H/6W/TT/27K/GX23/ND/STD  
 UPC: 69549653665  
 Case quantity: 20

LED PL Base	CFL bases replacement
GX23	GX23, GX23-2

NOTE: This LED lamp is a direct replacement for the CFL bases listed above. However, the base of this LED lamp can be compatible with all GX23 CFL bases.



## PERFORMANCE DATA

Shape: PL Vertical-Horizontal  
 Base: GX23  
 Watts (W): 6  
 Install method: Ballast bypass and ballast compatible (magnetic)  
 Lamp voltage (VAC): 120 V-277 V  
 Color temperature (K)\*\*: 2 700  
 Average life (L70 hours): 50 000  
 Initial Lumens (lm)\*: 525  
 Initial lumens per watt (lm/W): 88  
 CRI: 83  
 Beam angle (°): 180 / 360  
 Power factor: 0.9  
 Operating temperature range: -20°C / -4°F to 45°C / 113°F

\*Initial lumens range: +/- 10 %    \*\*Typical colour temperature range: +/- 5 %



## CAUTIONS

Turn power off before inspection, installation, or removal.  
 Risk of electrical shock – do not use where directly exposed to water or weather.  
 Not for use in totally enclosed luminaires.  
 Do not open – no user serviceable parts inside.  
 This device is not intended for use with emergency exit fixtures or emergency exit lights.  
 Not for use with dimmers.  
 This lamp only operates on magnetic ballasts or ballast bypass. If the lamp does not light up when the luminaire is energized, remove the lamp from the luminaire and contact the lamp manufacturer or a qualified electrician.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.