



LED Fluorescent Replacement Lamps

Find the perfect LED alternative for fluorescent lamps while eliminating mercury content from your lighting system. Increased energy efficiency makes these lamps the ideal replacement for any application.

LED T8

- Compatible with a variety of electronic instant start, rapid start and program start ballasts.
- Quality glass encasing ensures protection against tube yellowing and brittleness.
- Plug and play solution for easy installation while allowing the fixture to keep its certification, without any additional wiring needed.
- Significantly reduces costly re-lamping charges.
- No start-up time required compared to traditional fluorescent lamps.

LED T8 Metric

- LED T8 Metric lamps are specifically designed for the Canadian market.
- Their 46" length makes these tubes perfect for many government building fixtures.
- Avoid costly and time consuming fixture replacements with this retrofit solution.



T8



T8 Metric

Order code	Description	Base	System watts			Lumen output ¹ (lm)			Colour temp. (K)	CRI	Life L70 (hrs)	Dimming capability (Yes/No)	Case qty (inner/master)
			(W)										
			LBF	NBF	HBF ⁴	LBF	NBF	HBF					
T8 2 ft.													
65473	LED/T8/S4/9W/840/24/STD	G13	10	12	16	1 100	1 350	1 800	4 000	80	50 000	No	1/25
T8 3 ft.													
63632 ²	LED/T8/11W/840/36/STD	G13	12	14	18	1 305	1 500	1 900	4 000	86	50 000	No	1/25
64663 ²	LED/T8/S3/13W/840/36/STD	G13	15	16	20	1 500	1 600	2 000	4 000	83	50 000	No	1/25
T8 4 ft.													
65474	LED/T8/S4/13W/835/48/STD	G13	14	16	22	1 550	1 800	2 400	3 500	80	50 000	No	1/25
65475	LED/T8/S4/13W/840/48/STD	G13	14	16	22	1 600	1 900	2 450	4 000	80	50 000	No	1/25
65476	LED/T8/S4/13W/850/48/STD	G13	14	16	22	1 700	2 000	2 500	5 000	80	50 000	No	1/25
65477	LED/T8/S4/15W/835/48/STD	G13	16	18	26	1 750	2 000	2 800	3 500	80	50 000	No	1/25
65478	LED/T8/S4/15W/840/48/STD	G13	16	18	26	1 800	2 100	2 850	4 000	80	50 000	No	1/25
65479	LED/T8/S4/15W/850/48/STD	G13	16	18	26	1 900	2 200	2 900	5 000	80	50 000	No	1/25
T8 Metric - 46 in.													
65049 ²	LED/T8/15W/835/46/METRIC/STD	G13	16	18	26	1 650	1 850	2 650	3 500	83	50 000	No	1/25
65050 ²	LED/T8/15W/840/46/METRIC/STD	G13	16	18	26	1 700	1 950	2 750	4 000	83	50 000	No	1/25

¹ Lumen values are derived from photometric testing.

² Not DLC

³ For a complete list of compatible ballasts and DLC qualified products, please visit www.standardpro.com

⁴ LBF= Low ballast factor, NBF= Neutral ballast factor, HB⁴= High ballast factor



LED Safety Max

With the same advantages as regular LED T8 lamps, safety coated lamps are shatter resistant to protect employees, production, customers and your business reputation.

- PTFE coated lamps help to contain broken glass if a lamp is dropped.
- All lamps are NSF rated for food equipment safety.
- Perfect solution for commercial kitchens, art galleries, museums and schools.
- All LED T8 lamps with a Safety Max coating are made to order with a minimum order quantity of 300 lamps. Lamps must be ordered by case quantity of 25 lamps. These items are non-cancellable and non-refundable.



Safety Max T8

Order code	Description	Base	System watts			Lumen output ¹ (lm)			Colour temp. (K)	CRI	Life L70 (hrs)	Dimming capability (Yes/No)	Case qty (inner/master)
			(W)										
			LBF	NBF	HB ^{F4}	LBF	NBF	HB ^F					
T8 2 ft.													
65504 ²	LED/T8/S3/9W/830/24/STD/SMX	G13	10	12	16	1 000	1 200	1 600	3 000	80	50 000	No	1/25
65505 ²	LED/T8/S3/9W/835/24/STD/SMX	G13	10	12	16	1 000	1 200	1 600	3 500	80	50 000	No	1/25
65506	LED/T8/S3/9W/840/24/STD/SMX	G13	10	12	16	1 000	1 200	1 600	4 000	80	50 000	No	1/25
T8 3 ft.													
64817 ²	LED/T8/S3/13W/830/36/STD/SMX	G13	15	16	20	1 500	1 600	2 000	3 000	83	50 000	No	1/25
64818 ²	LED/T8/S3/13W/835/36/STD/SMX	G13	15	16	20	1 500	1 600	2 000	3 500	83	50 000	No	1/25
64833 ²	LED/T8/S3/13W/840/36/STD/SMX	G13	15	16	20	1 500	1 600	2 000	4 000	83	50 000	No	1/25
T8 4 ft.													
65507	LED/T8/S4/13W/830/48/STD/SMX	G13	12	16	23	1 400	1 750	2 300	3 000	80	50 000	No	1/25
65508	LED/T8/S4/13W/835/48/STD/SMX	G13	12	16	23	1 450	1 800	2 350	3 500	80	50 000	No	1/25
65509	LED/T8/S4/13W/840/48/STD/SMX	G13	12	16	23	1 500	1 900	2 650	4 000	80	50 000	No	1/25
65510	LED/T8/S4/13W/850/48/STD/SMX	G13	12	16	23	1 600	2 000	2 700	5 000	80	50 000	No	1/25
65511	LED/T8/S4/15W/830/48/STD/SMX	G13	14	18	25	1 550	1 950	2 650	3 000	80	50 000	No	1/25
65512	LED/T8/S4/15W/835/48/STD/SMX	G13	14	18	25	1 600	2 000	2 700	3 500	80	50 000	No	1/25
65513	LED/T8/S4/15W/840/48/STD/SMX	G13	14	18	25	1 650	2 100	2 750	4 000	80	50 000	No	1/25
65514	LED/T8/S4/15W/850/48/STD/SMX	G13	14	18	25	1 750	2 200	2 800	5 000	80	50 000	No	1/25

¹ Lumen values are derived from photometric testing.


² Not DLC

³ For a complete list of compatible ballasts and DLC qualified products, please visit www.standardpro.com

⁴ LBF= Low ballast factor, NBF= Neutral ballast factor, HB⁴= High ballast factor



Intertek
CONFORMS TO NSF/ANSI 2

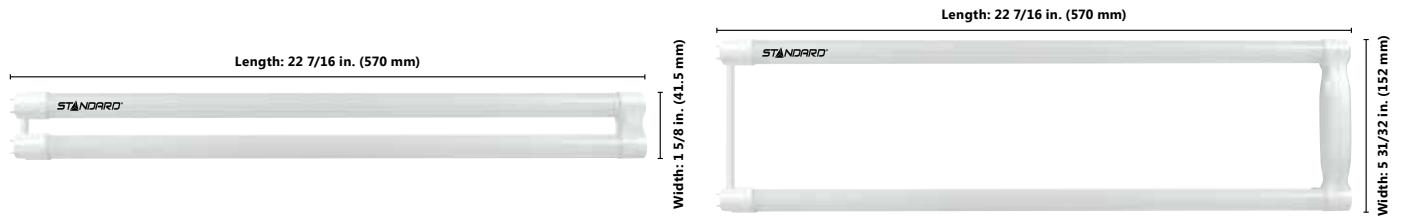

U-Bent U1

U-Bent U6

Order code	Description	Base	System watts			Lumen output¹ (lm)			Colour temp. (K)	CRI	Life L70 (hrs)	Dimming capability (Yes/No)	Case qty (Inner/master)
			(W)										
			LBF	NBF	HBF⁴	LBF	NBF	HBF					
U-Bent													
64320²	LED/T8/17W/840/48/U1/ND/STD/SMX	G13	18	20	27	2 050	2 370	3 080	4 000	82	50 000	No	1/12
64331²	LED/T8/12W/835/48/U6/ND/STD/SMX	G13	13	15	20	1 520	1 750	2 220	3 500	82	50 000	No	1/12
64321²	LED/T8/12W/840/48/U6/ND/STD/SMX	G13	13	15	20	1 590	1 840	2 320	4 000	82	50 000	No	1/12
64322²	LED/T8/17W/840/48/U6/ND/STD/SMX	G13	18	20	27	2 050	2 370	3 080	4 000	82	50 000	No	1/12



T5

Order code	Description	Base	Watts (W)	Initial lumens¹ (lm)	Colour temp. (K)	CRI	Life L70 (hrs)	Dimming capability (Yes/No)	Case qty (inner/master)
T5 46 in.									
65480	LED/T5/S2/25.5W/840/46/STD/SMX	G5	25.5	3 100	4 000	>80	50 000	No	1/25
65481	LED/T5/S2/25.5W/850/46/STD/SMX	G5	25.5	3 150	5 000	>80	50 000	No	1/25
65482²	LED/T5/S2/25.5W/865/46/STD/SMX	G5	25.5	3 200	6 500	>80	50 000	No	1/25

¹ Lumen values are derived from photometric testing.² Not DLC³ For a complete list of compatible ballasts and DLC qualified products, please visit www.standardpro.com⁴ LBF= Low ballast factor, NBF= Neutral ballast factor, HB⁴= High ballast factor

CONFORMS TO NSF/ANSI 2