


Technical Information Bulletin - LED

E-Lume™

ORDERING INFORMATION

Order code: 63263
Description: LED/OMNI/9.5W/30K/ND/ELUME
UPC: 069549632639
Case quantity: 24

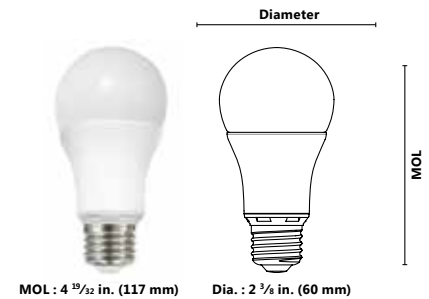

PERFORMANCE DATA

Shape: OMNI A19
Wattage (W): 9.5
Base: E26
Lamp voltage (VAC): 120
Colour temperature (K)**: 3 000
Average life (L70 hours): 25 000
Initial lumens (lm)*: 806
Initial lumens per watt (lm/W): 85
CBCP: -
CRI: 80
Beam angle: 240
Power factor: -
Operating temperature range: -20 °C/4 °F to 45 °C/113 °F

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %



DAMP



NO
MERCURY



COMPLIANT



WARRANTY



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Suitable for use in open fixtures.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Not suitable for use on dimming circuits.
- Three year limited warranty.
- For warranty information visit www.standardpro.com.
- Operating temperature: -20 °C/4 °F to 45 °C/113 °F.

NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.