

# Technical Information Bulletin

## Design LED Filament Lamps




Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 67756  
 Description: B11/S3/5W/40K/E12/V/FIL/STD  
 UPC: 69549677555  
 Case quantity: 10 / 100

### PHYSICAL DATA

Shape: B11  
 Base: E12  
 Finish: Clear  
 Filament type: Vertical

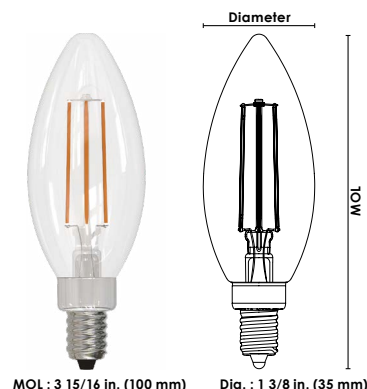

### PERFORMANCE DATA

Watts (W): 5  
 Volts (VAC): 120  
 Colour temp. (K)<sup>1</sup>: 4 000  
 Lumen output (lm)<sup>2</sup>: 500  
 Lumen per Watts (lm/W): 100  
 Traditional equivalent (W): 60  
 CRI: 80  
 Life L70 (h): 15 000  
 Beam angle (°): 300  
 Power factor: 0.9  
 Frequency (Hz): 60  
 Dimming: Forward  
 Burning position: Universal  
 Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

<sup>1</sup> Typical colour temperature range: +/- 5 %  
<sup>2</sup> Initial lumens range: +/- 5 %

### COMPATIBLE DIMMERS

BRAND	MODEL
COOPER	RRD-6NA, AAL06, SLC03P,
LEGRAND	RH703PTUTC
LEVITON	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
LUTRON	PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRL-253P, SELV-300P, MACL-153P

\* Slight flicker might occur on low intensity with some dimmers



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

December 13, 2019