



# LED Ceiling Luminaire

Discover our LED ceiling luminaire line equipped with high quality integrated LED: they are an energy efficient solution with a life rating of 50 000 hours. This line offers a pleasant, dimmable light making a great solution for any general lighting needs. Thanks to our variety of decorative options you can enjoy direct or indirect lighting fitting seamlessly into any commercial and residential installations.

# LED Traditional

02



6", 8"



11", 14"





16", 18", 20", 22"


| Order code                | Description                 | Watts<br>(W) | Volts<br>(VAC) | Colour temp.<br>(K) | Lumen output<br>(lm) | CRI | Life<br>L70<br>(hrs) | Size<br>(in.) | Shape  | Finish | Case qty<br>(master) |
|---------------------------|-----------------------------|--------------|----------------|---------------------|----------------------|-----|----------------------|---------------|--------|--------|----------------------|
| <b>6", 8"</b>             |                             |              |                |                     |                      |     |                      |               |        |        |                      |
| 66716                     | LED/CL6/10W/30K/FM/RND/STD  | 10           | 120            | 3 000               | 785                  | 80  | 50 000               | 6             | Round  | White  | 24                   |
| 66717                     | LED/CL6/10W/40K/FM/RND/STD  | 10           | 120            | 4 000               | 822                  | 80  | 50 000               | 6             | Round  | White  | 24                   |
| 66718                     | LED/CL8/12W/30K/FM/RND/STD  | 12           | 120            | 3 000               | 1012                 | 80  | 50 000               | 8             | Round  | White  | 12                   |
| 66719                     | LED/CL8/12W/40K/FM/RND/STD  | 12           | 120            | 4 000               | 1049                 | 80  | 50 000               | 8             | Round  | White  | 12                   |
| <b>11", 14"</b>           |                             |              |                |                     |                      |     |                      |               |        |        |                      |
| 65598                     | LED/CL11/15W/27K/FM/RND/STD | 15           | 120            | 2 700               | 1 120                | 80  | 50 000               | 11            | Round  | White  | 4                    |
| 66711                     | CL11/S2/15W/30K/RND/WH/STD  | 15           | 120            | 3 000               | 1 150                | 80  | 50 000               | 11            | Round  | White  | 4                    |
| 66712                     | CL11/S2/15W/40K/RND/WH/STD  | 15           | 120            | 4 000               | 1 164                | 80  | 50 000               | 11            | Round  | White  | 4                    |
| 63300                     | LED/CL11/15W/30K/FM/SQR/STD | 15           | 120            | 3 000               | 1 020                | 80  | 50 000               | 11            | Square | White  | 4                    |
| 63301                     | LED/CL11/15W/40K/FM/SQR/STD | 15           | 120            | 4 000               | 1 123                | 80  | 50 000               | 11            | Square | White  | 4                    |
| 66713                     | LED/CL14/25W/27K/FM/RND/STD | 25           | 120            | 2 700               | 1 718                | 80  | 50 000               | 14            | Round  | White  | 4                    |
| 66714                     | CL14/S2/25W/30K/RND/WH/STD  | 25           | 120            | 3 000               | 1 783                | 80  | 50 000               | 14            | Round  | White  | 4                    |
| 66715                     | CL14/S2/25W/40K/RND/WH/STD  | 25           | 120            | 4 000               | 1 851                | 80  | 50 000               | 14            | Round  | White  | 4                    |
| 63304                     | LED/CL14/25W/30K/FM/SQR/STD | 25           | 120            | 3 000               | 1 723                | 80  | 50 000               | 14            | Square | White  | 4                    |
| 63305                     | LED/CL14/25W/40K/FM/SQR/STD | 25           | 120            | 4 000               | 1 844                | 80  | 50 000               | 14            | Square | White  | 4                    |
| <b>16", 18", 20", 22"</b> |                             |              |                |                     |                      |     |                      |               |        |        |                      |
| 65665                     | LED/CL16/26W/30K/FM/RND/STD | 26           | 120            | 3 000               | 2 034                | 80  | 50 000               | 16            | Round  | White  | 4                    |
| 65666                     | LED/CL16/26W/40K/FM/RND/STD | 26           | 120            | 4 000               | 2 170                | 80  | 50 000               | 16            | Round  | White  | 4                    |
| 65667                     | LED/CL18/32W/30K/FM/RND/STD | 32           | 120            | 3 000               | 2 644                | 80  | 50 000               | 18            | Round  | White  | 4                    |
| 65668                     | LED/CL18/32W/40K/FM/RND/STD | 32           | 120            | 4 000               | 2 898                | 80  | 50 000               | 18            | Round  | White  | 4                    |
| 65661                     | LED/CL20/37W/30K/FM/RND/STD | 37           | 120            | 3 000               | 3 098                | 80  | 50 000               | 20            | Round  | White  | 2                    |
| 65662                     | LED/CL20/37W/40K/FM/RND/STD | 37           | 120            | 4 000               | 3 144                | 80  | 50 000               | 20            | Round  | White  | 2                    |
| 65663                     | LED/CL22/40W/30K/FM/RND/STD | 40           | 120            | 3 000               | 3 424                | 80  | 50 000               | 22            | Round  | White  | 2                    |
| 65664                     | LED/CL22/40W/40K/FM/RND/STD | 40           | 120            | 4 000               | 3 534                | 80  | 50 000               | 22            | Round  | White  | 2                    |

## Replacement Lenses

| Order code | Description           | Replacement for     |
|------------|-----------------------|---------------------|
| 64867      | LED/CL6/LENS/RND/STD  | 66716, 66717        |
| 64868      | LED/CL8/LENS/RND/STD  | 66718, 66719        |
| 64869      | LED/CL11/LENS/RND/STD | 66711, 66712, 65598 |
| 64877      | LED/CL11/LENS/SQR/STD | 63300, 63301        |
| 64878      | LED/CL14/LENS/RND/STD | 66714, 66715, 66713 |
| 64879      | LED/CL14/LENS/SQR/STD | 63304, 63305        |



11": 3" (76.2 mm)  
14": 3" (76.2 mm)  
16": 4 3/8" (111 mm)  
18": 4 3/16" (106 mm)  
20": 4 11/32" (110 mm)  
22": 4 3/16" (106 mm)



Lumen values are derived from photometric testing.  
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)


# Shade

Our shades create a warm and elegant atmosphere. They complement our 11" and 14" LED traditional ceiling luminaires and are offered in assorted materials and textures which allows you to create a specific ambient style.

- Drum profile
- Materials and textures available: silk type, cork, wood, and linen type



| Order code                                               | Description                   | Shape | Material   | Finish        | Case qty (master) |
|----------------------------------------------------------|-------------------------------|-------|------------|---------------|-------------------|
| <b>Compatible for 11" traditional ceiling luminaires</b> |                               |       |            |               |                   |
| 65681                                                    | LED/CL11/SHADE/RND/WHITE/STD  | Round | Linen type | White         | 6                 |
| 65682                                                    | LED/CL11/SHADE/RND/BEIGE/STD  | Round | Linen type | Beige         | 6                 |
| 65683                                                    | LED/CL11/SHADE/RND/BLACK/STD  | Round | Linen type | Black         | 6                 |
| 65684                                                    | LED/CL11/SHADE/RND/DGRAY/STD  | Round | Linen type | Grey          | 6                 |
| 65685                                                    | LED/CL11/SHADE/RND/WOOD/STD   | Round | Wood       | Wood          | 6                 |
| 65686                                                    | LED/CL11/SHADE/RND/CORK/STD   | Round | Cork       | Cork          | 6                 |
| 65687                                                    | LED/CL11/SHADE/RND/WFROST/STD | Round | Silk type  | White frosted | 6                 |
| 66044                                                    | LED/CL11/SHADE/RND/BRNW/STD   | Round | Wood       | Barn wood     | 6                 |
| <b>Compatible for 14" traditional ceiling luminaires</b> |                               |       |            |               |                   |
| 65688                                                    | LED/CL14/SHADE/RND/WHITE/STD  | Round | Linen type | White         | 6                 |
| 65689                                                    | LED/CL14/SHADE/RND/BEIGE/STD  | Round | Linen type | Beige         | 6                 |
| 65690                                                    | LED/CL14/SHADE/RND/BLACK/STD  | Round | Linen type | Black         | 6                 |
| 65691                                                    | LED/CL14/SHADE/RND/DGRAY/STD  | Round | Linen type | Grey          | 6                 |
| 65692                                                    | LED/CL14/SHADE/RND/WOOD/STD   | Round | Wood       | Wood          | 6                 |
| 65693                                                    | LED/CL14/SHADE/RND/CORK/STD   | Round | Cork       | Cork          | 6                 |
| 65694                                                    | LED/CL14/SHADE/RND/WFROST/STD | Round | Silk type  | White Frosted | 6                 |
| 66045                                                    | LED/CL14/SHADE/RND/BRNW/STD   | Round | Wood       | Barn wood     | 6                 |

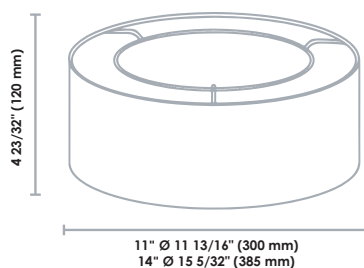



# LED Brushed Nickel

02



6", 8"




11", 14"

| Order code       | Description                     | Watts (W) | Volts (VAC) | Colour temp. (K) | Lumen output (lm) | CRI | Life L70 (hrs) | Finish         | Case qty (master) |
|------------------|---------------------------------|-----------|-------------|------------------|-------------------|-----|----------------|----------------|-------------------|
| <b>6" Round</b>  |                                 |           |             |                  |                   |     |                |                |                   |
| 64247            | LED/CLBN5.75/10W/30K/FM/RND/STD | 10        | 120         | 3 000            | 640               | 80  | 50 000         | Brushed nickel | 24                |
| 64248            | LED/CLBN5.75/10W/40K/FM/RND/STD | 10        | 120         | 4 000            | 660               | 80  | 50 000         | Brushed nickel | 24                |
| <b>8" Round</b>  |                                 |           |             |                  |                   |     |                |                |                   |
| 66722            | CL8/S2/12W/30K/RND/BN/STD       | 12        | 120         | 3 000            | 951               | 80  | 50 000         | Brushed nickel | 12                |
| 64250            | LED/CLBN7.75/12W/40K/FM/RND/STD | 12        | 120         | 4 000            | 784               | 80  | 50 000         | Brushed nickel | 12                |
| <b>11" Round</b> |                                 |           |             |                  |                   |     |                |                |                   |
| 67146            | CL11/S2/15W/30K/RND/BN/STD      | 15        | 120         | 3 000            | 1 176             | 80  | 50 000         | Brushed nickel | 4                 |
| 64096            | LED/CLBN11/15W/40K/FM/RND/STD   | 15        | 120         | 4 000            | 1 284             | 80  | 50 000         | Brushed nickel | 4                 |
| <b>14" Round</b> |                                 |           |             |                  |                   |     |                |                |                   |
| 64099            | LED/CLBN14/25W/30K/FM/RND/STD   | 25        | 120         | 3 000            | 2 041             | 80  | 50 000         | Brushed nickel | 4                 |
| 64100            | LED/CLBN14/25W/40K/FM/RND/STD   | 25        | 120         | 4 000            | 2 102             | 80  | 50 000         | Brushed nickel | 4                 |


## Replacement Lenses

| Order code | Description               | Replacement for |
|------------|---------------------------|-----------------|
| 64880      | LED/CLBN5.75/LENS/RND/STD | 64247, 64248    |
| 64881      | LED/CLBN7.75/LENS/RND/STD | 66722, 64250    |
| 64882      | LED/CLBN11/LENS/RND/STD   | 67146, 64096    |
| 64883      | LED/CLBN14/LENS/RND/STD   | 64099, 64100    |

6" : 2 15/32" (63 mm)  
8" : 3 7/32" (81.5 mm)



11" : 3 5/32" (80 mm)  
14" : 3 7/16" (87 mm)



# LED Double Ring

02



Brushed nickel




Black



Chrome

12", 14", 16"

| Order code       | Description                       | Watts<br>(W) | Volts<br>(VAC) | Colour temp.<br>(K) | Lumen output<br>(lm) | CRI | Life<br>L70<br>(hrs) | Finish         | Case qty<br>(master) |
|------------------|-----------------------------------|--------------|----------------|---------------------|----------------------|-----|----------------------|----------------|----------------------|
| <b>12" Round</b> |                                   |              |                |                     |                      |     |                      |                |                      |
| 65605            | LED/CLDR/BN/12/20W/30K/FM/RND/STD | 20           | 120            | 3 000               | 1 525                | 80  | 50 000               | Brushed nickel | 4                    |
| 66862            | CLDR12/S2/20W/40K/RND/BN/STD      | 20           | 120            | 4 000               | 1464                 | 80  | 50 000               | Brushed nickel | 4                    |
| 66855            | CLDR12/S2/20W/30K/RND/BK/STD      | 20           | 120            | 3 000               | 1 458                | 80  | 50 000               | Black          | 4                    |
| 66858            | CLDR12/S2/20W/30K/RND/CH/STD      | 20           | 120            | 3 000               | 1 458                | 80  | 50 000               | Chrome         | 4                    |
| <b>14" Round</b> |                                   |              |                |                     |                      |     |                      |                |                      |
| 66863            | CLDR14/S2/25W/30K/RND/BN/STD      | 25           | 120            | 3 000               | 1 860                | 80  | 50 000               | Brushed nickel | 4                    |
| 66864            | CLDR14/S2/25W/40K/RND/BN/STD      | 25           | 120            | 4 000               | 1 880                | 80  | 50 000               | Brushed nickel | 4                    |
| 66856            | CLDR14/S2/25W/30K/RND/BK/STD      | 25           | 120            | 3 000               | 1 860                | 80  | 50 000               | Black          | 4                    |
| 66859            | CLDR14/S2/25W/30K/RND/CH/STD      | 25           | 120            | 3 000               | 1 860                | 80  | 50 000               | Chrome         | 4                    |
| <b>16" Round</b> |                                   |              |                |                     |                      |     |                      |                |                      |
| 65611            | LED/CLDR/BN/16/26W/30K/FM/RND/STD | 26           | 120            | 3 000               | 2 049                | 80  | 50 000               | Brushed nickel | 2                    |
| 66866            | CLDR16/S2/26W/40K/RND/BN/STD      | 26           | 120            | 4 000               | 1 950                | 80  | 50 000               | Brushed nickel | 2                    |
| 66857            | CLDR16/S2/26W/30K/RND/BK/STD      | 26           | 120            | 3 000               | 1 923                | 80  | 50 000               | Black          | 2                    |
| 66860            | CLDR16/S2/26W/30K/RND/CH/STD      | 26           | 120            | 3 000               | 1 923                | 80  | 50 000               | Chrome         | 2                    |

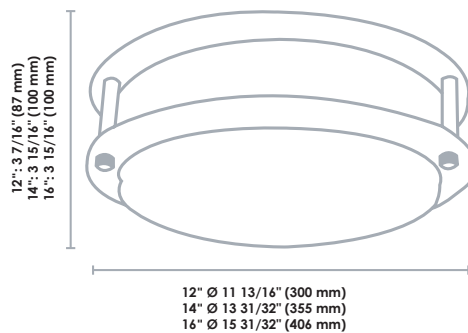

DAMP



DIMMABLE



WARRANTY



UL US



ENERGY STAR

Lumen values are derived from photometric testing.  
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)




# LED Edge-Lit

The LED Edge-Lit ceiling luminaire has a very slim design for a modern and minimalist look. These thin luminaires are equipped with an LED edge-lit technology to eliminate hot spots on the surface and provide a crisp and even light. Offered in a variety of shapes and sizes, it will fit any application.

- Easy twist-lock installation
- No visible screws
- Safety cable included
- Frosted polycarbonate lens





6", 8", 12"



6", 8", 12"

| Order code        | Description                             | Watts (W) | Volts (VAC) | Colour temp. (K) | Lumen output (lm) | CRI | Life L70 (hrs) | Finish | Case qty (master) |
|-------------------|-----------------------------------------|-----------|-------------|------------------|-------------------|-----|----------------|--------|-------------------|
| <b>6" Round</b>   |                                         |           |             |                  |                   |     |                |        |                   |
| 65454             | LED/CL6/EDGE LIT/11W/30K/FM/RND/WH/STD  | 11        | 120         | 3 000            | 855               | 80  | 50 000         | White  | 20                |
| 65455             | LED/CL6/EDGE LIT/11W/40K/FM/RND/WH/STD  | 11        | 120         | 4 000            | 896               | 80  | 50 000         | White  | 20                |
| <b>6" Square</b>  |                                         |           |             |                  |                   |     |                |        |                   |
| 65460             | LED/CL6/EDGE LIT/11W/30K/FM/SQR/WH/STD  | 11        | 120         | 3 000            | 852               | 80  | 50 000         | White  | 20                |
| 65461             | LED/CL6/EDGE LIT/11W/40K/FM/SQR/WH/STD  | 11        | 120         | 4 000            | 893               | 80  | 50 000         | White  | 20                |
| <b>8" Round</b>   |                                         |           |             |                  |                   |     |                |        |                   |
| 65456             | LED/CL8/EDGE LIT/14W/30K/FM/RND/WH/STD  | 14        | 120         | 3 000            | 1 066             | 80  | 50 000         | White  | 20                |
| 65457             | LED/CL8/EDGE LIT/14W/40K/FM/RND/WH/STD  | 14        | 120         | 4 000            | 1 118             | 80  | 50 000         | White  | 20                |
| <b>8" Square</b>  |                                         |           |             |                  |                   |     |                |        |                   |
| 65462             | LED/CL8/EDGE LIT/14W/30K/FM/SQR/WH/STD  | 14        | 120         | 3 000            | 1 065             | 80  | 50 000         | White  | 20                |
| 65463             | LED/CL8/EDGE LIT/14W/40K/FM/SQR/WH/STD  | 14        | 120         | 4 000            | 1 115             | 80  | 50 000         | White  | 20                |
| <b>12" Round</b>  |                                         |           |             |                  |                   |     |                |        |                   |
| 65458             | LED/CL12/EDGE LIT/22W/30K/FM/RND/WH/STD | 22        | 120         | 3 000            | 1 647             | 80  | 50 000         | White  | 10                |
| 65459             | LED/CL12/EDGE LIT/22W/40K/FM/RND/WH/STD | 22        | 120         | 4 000            | 1 725             | 80  | 50 000         | White  | 10                |
| <b>12" Square</b> |                                         |           |             |                  |                   |     |                |        |                   |
| 65464             | LED/CL12/EDGE LIT/22W/30K/FM/SQR/WH/STD | 22        | 120         | 3 000            | 1 636             | 80  | 50 000         | White  | 10                |
| 65465             | LED/CL12/EDGE LIT/22W/40K/FM/SQR/WH/STD | 22        | 120         | 4 000            | 1 713             | 80  | 50 000         | White  | 10                |

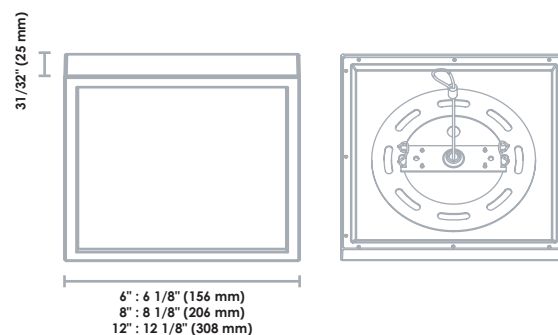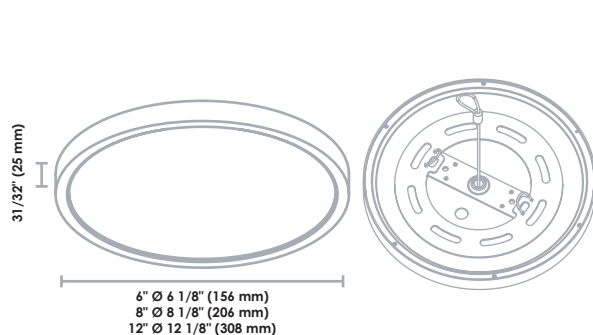

DIMMABLE



WET



5 YEARS WARRANTY



ETL Intertek




ENERGY STAR

Lumen values are derived from photometric testing.  
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)


# LED Tri-Level

Dimming technology maximizes energy savings by intelligently managing illumination levels to avoid wasted energy. The luminaire is controlled by a motion sensor that triggers light levels from low to high upon occupancy, and users can adjust the luminaire's standby light levels by percentage of light, lux and dimming delay of full output.


Perfect for lighting applications that require illumination 24/7, this technology represents a significant energy savings opportunity.




1. When there is sufficient natural light and a presence is detected the luminaire will not turn on, it will stay dimmed.



2. With insufficient natural light, the light is switched on automatically when presence is detected; it will remain on at 100% during the motion hold-time.

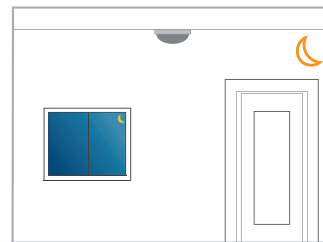

3. If no presence is detected the light dims to 10% and 30% (options) stand-by levels after the hold time.

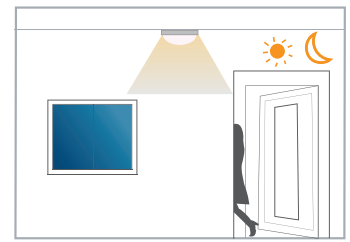

4. Optional: Light switches off automatically after the stand-by period has elapsed.

| Order code       | Description                     | Watts (W) | Volts (V) | Colour temp. (K) | Lumen output (lm) | CRI | Life L70 (hrs) | Sensor type | Finish       | Case qty (master) |
|------------------|---------------------------------|-----------|-----------|------------------|-------------------|-----|----------------|-------------|--------------|-------------------|
| <b>11" Round</b> |                                 |           |           |                  |                   |     |                |             |              |                   |
| 65723            | LED/CL11TLEV/12W/40K/FM/RND/STD | 12        | 120       | 4 000            | 1 020             | 80  | 50 000         | Microwave   | White        | 4                 |
| 67068            | CL11TLEV/15W/40K/RND/BN/STD     | 15        | 120       | 4 000            | 1 148             | 80  | 50 000         | Microwave   | Brush nickel | 4                 |

