

TECHNICAL INFORMATION BULLETIN

T8 3 FEET 800 SERIES

Ordering Information

Order code: 10912
 Description: F25T8/35K/8/RS/G13/STD ESV
 UPC: 69549109124
 Case quantity: 25



Performance Data

Initial lumens (lm): 2 225
 Mean lumens (lm): 2 140
 Nominal efficiency (lm/W): 89
 Wattage (W): 25
 Colour temperature (K): 3 500
 CRI: 85
 Average life (hrs): 24 000

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Lamp Characteristics

Shape: T8
 Base: Med Bipin
 Diameter: 1 in. (26 mm)
 Nominal length: 36 in. (915 mm)
 Starting method: Rapid Start (RS)
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Cathode guard: Yes
 Nominal lamp operating frequency (Hz): 60

² Minimum starting temperature (°C): -10


Benefits

One system Lamp/Ballast Warranty.
 Extended lamp warranty from 2 to 3 years and ballast warranty from 3 to 5 years.



² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Instant Start ballast.

Dimensions

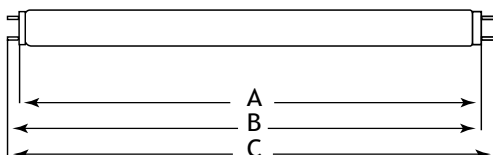

A Max
Base face
to base face

B Min/B Max
Base face to end
of opposite face pin

C Max
End of base pin to the end
of opposite end


F25T8

35.22 in.
894.6 mm

35.40 in. / 35.50 in.
899.2 mm / 901.7 mm

35.78 in.
908.8 mm

Spectral distribution

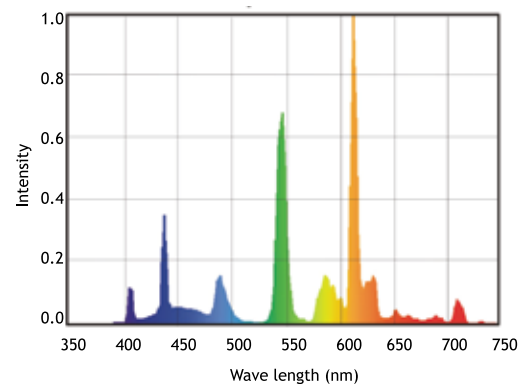

For more information on our complete product line visit us at www.standardpro.com