

# TECHNICAL INFORMATION BULLETIN

## T4

### Ordering Information

Order code: 10627  
Description: F8T4/41K/330mm/G5/STD  
UPC: 69549106277  
Case quantity: 48



### Performance Data

Initial lumens (lm): 500  
Nominal efficiency (lm/W): 63  
Wattage (W): 8  
Colour temperature (K): 4 100  
CRI: 80  
Average life (hrs): 8 000

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.


### Lamp Characteristics

Shape: T4  
Base: Min Bipin  
Diameter: 1/2 in. (12 mm)  
Nominal length: 13 in. (330 mm)  
Starting method: Rapid Start Lamp  
TCLP compliant: N/A  
Phosphor composition: Triphosphor  
Cathode guard: N/A  
Nominal lamp operating frequency (Hz): 60

<sup>2</sup> Minimum starting temperature (°C): -10

<sup>2</sup> The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T4 Program Start ballast.

### Dimensions

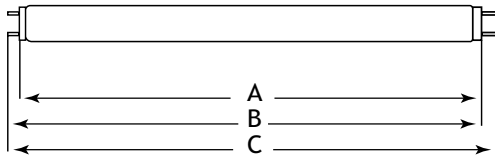

A Max Base face to base face	B Min/B Max Base face to end of opposite face pin	C Min/C Max End of base pin to the end of opposite end
12.35 in. 313.80 mm	12.63 in./12.68 in. 320.90 mm/ 322.10 mm	12.91 in./12.96 in. 328.00 mm/329.20 mm

F8T4

### Spectral distribution

