

TECHNICAL INFORMATION BULLETIN

ENERGY SAVER T5

Ordering Information

Order code: 10611
Description: F35T5/41K/8/PS/G5/STD
UPC: 69549106116
Case quantity: 25



Performance Data

Initial lumens (lm): 3 650
Mean lumens (lm): 3 450
Nominal efficiency (lm/W): 104
Wattage (W): 35
Colour temperature (K): 4 100
CRI: 85
Average life (hrs):
Based on a 3 hour start 24 000
Based on a 12 hour start 35 000

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Lamp Characteristics

Shape: T5
Base: Min Bipin
Diameter: 5/8 in. (16 mm)
Nominal length: 58 in. (1 473 mm)
Starting method: Program Start (PS)
TCLP compliant: Yes
Phosphor composition: Triphosphor
Cathode guard: Yes
Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10


Benefits

One system Lamp/Ballast Warranty.
Extended lamp warranty from 2 to 3 years and ballast warranty from 3 to 5 years.



² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 Program Start ballast.

Dimensions

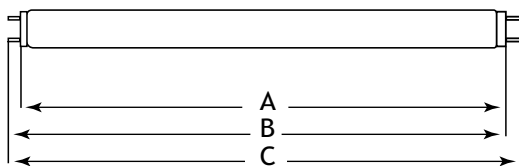

	A Max Base face to base face	B Min/B Max Base face to end of opposite face pin	C Max End of base pin to the end of opposite end
F35T5	57.04 in. 1 449.0 mm	57.23 in./57.32 in. 1 453.7 mm/1 456.1 mm	57.60 in. 1 463.2 mm

Spectral distribution

