


- PDF was successfully created - CLICK LINK TO DOWNLOAD =>http://www.satco.com/media/PDF/satco_product_7823.pdf

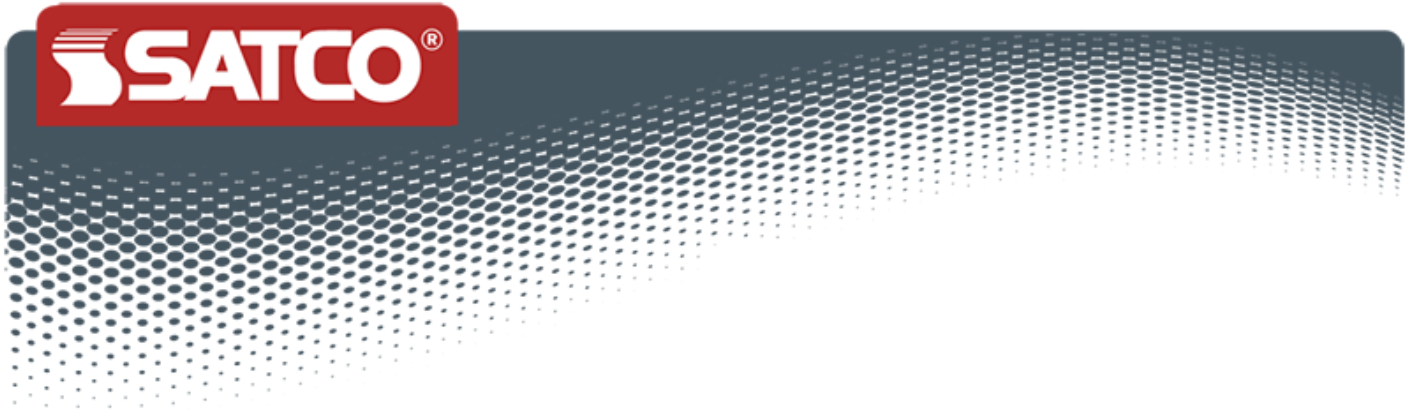

S11900

2W/LED/T5/840/BP

2W T5 LED; Miniature bi-pin base; 4000K; 50000 Average rated hours; 150 Lumens; 120-277V; Type B; Ballast Bypass; Double Ended Wiring



Features

- No ballast or external driver required
- Available in 6", 9", 12", & 21"
- Direct wire 120-277V line voltage
- Double ended wiring
- NSF Approved
- PET Shatterproof coated
- 5 year Limited warranty

S11900

Replaces F4T5/CW lamps

Item Number	UPC	Voltage	Watts	Operating Frequency	Fluorescent Equivalent	Power Factor	Lamp Shape
S11900	045923119002	120-277	2	50/60Hz	4W	0.90	T5

Base	ANSI Base	Lamp Code	Dimmable/Non-Dimmable	Finish	MOL In Inches	MOD In Inches	Initial Lumens
Miniature Bi-Pin	G5	2W/LED/T5/840/BP	Non-Dimmable	Frosted	5-29/32"	0-5/8"	150

Average Rated Hours	Kelvin Temp	Color	CRI	Beam Spread Deg	Operating Temperature	Pack	CEC Status
50000	4000	Cool White	80	240	-25C (-13F) to a maximum of +45C (+113F)	10	Lawful for sale in California

Material	RoHS Compliant	UL or ETL Listed	UL Classification	Warranty
Glass	Yes	Yes	cULus Classified - Damp Location Rated	5 Year Limited



National Toll-Free:
800.43.SATCO
(800.437.2826)
www.satco.com

Distribution Centers:
New York, Florida, Texas,
Washington, California,
Puerto Rico

Corporate Offices:
110 Heartland Blvd.,
Brentwood, NY 11717
800.437.2826 631.243.2022
Fax 631.243.2027



©2012, Satco Products, Inc. Not responsible for typographical errors. 06/12 S1051