




R2709

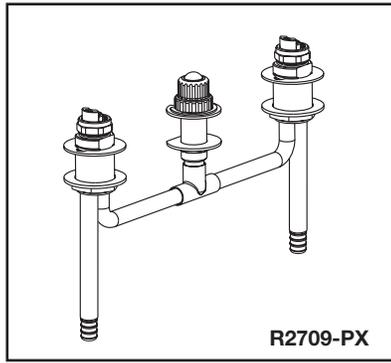

R2709-PX

Submitted Model No.: _____

Specific Features: _____

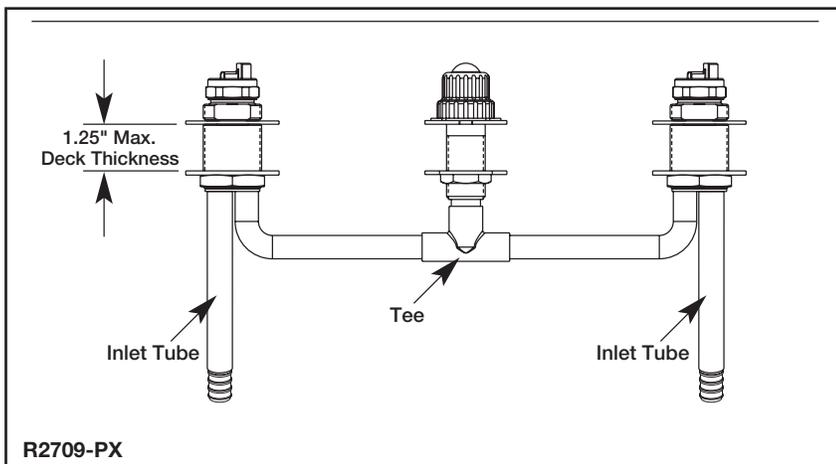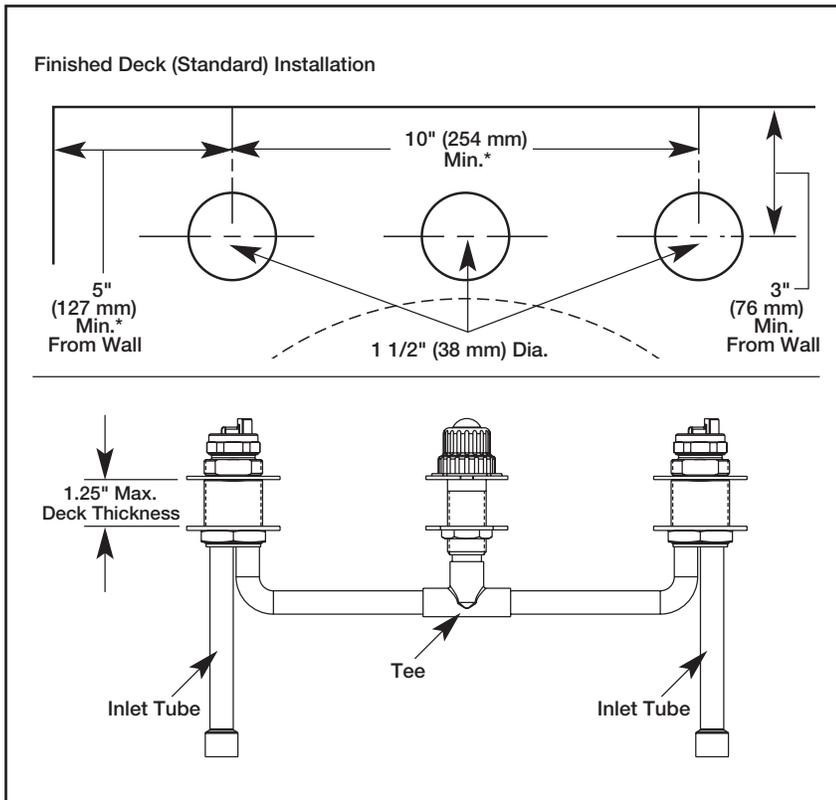

ROMAN TUB/WHIRLPOOL FAUCET TRIM

- Two Handle Roman Tub Rough-In Kit
- Deck or Ledge Mount
- Installed Before Mud and Tile Applied in Thick Deck Situation
- 10" (254 mm) centers
- Temperature and Volume Controlled with Handles
- Trim Kit Must Also be Ordered to Complete Installation

STANDARD SPECIFICATIONS:

- Washerless.
- Three hole installation.
- 5/8" O.D. copper supply inlet tubes.
- 10" (254 mm) centers.
- Deck or ledge mount installation.
- Solid fabricated brass end valves and spout body.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- Temperature and volume controlled with handles.
- All operating parts shall be replaceable from the top.
- NOTE: Trim kit must also be ordered to complete installation. Refer to separate trim kit specifications to determine the best kit for your situation.
- R2709-PX: Inlets are designed for use with ASTM F1807 copper crimp rings and ASTM F876/877 PEX tubing.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:

- ANSI/ASME A112.18.1/CSA B125.1



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-B-R2709 Rev. C

55 E. 111th Street, Indianapolis, Indiana 46280
395 Matheson Blvd. E., Mississauga, ON L4Z 2H2
© 2015 Masco Corporation of Indiana