

Individual Spec Sheet

LED WALL SCONCE - LINEAR

36"

ORDERING INFORMATION

Order code: 67349
Model number: SVAN/15W/36IN/30K/CH/F/STD
UPC: 069549673496
Case quantity: 10

PHYSICAL DATA

Size in. (mm): 36" (914 mm)
Housing finish: Chrome
Lens finish: Frosted
Lens material: Polycarbonate

PERFORMANCE DATA

Watts (W): 15
Volts (VAC): 120
Colour temp. (K): 3 000
Lumen output (lm): 1 221
Lumen per Watts (lm/W): 81
CRI: 90
Life L70 (h): 50 000
Beam angle (°): 120
THD (%): <15
Power factor: >0.9
Frequency (Hz): 60
Dimming: Forward and Reverse
Operating temp. range: -20°C to 40°C (-4°F to 104°F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

COMPATIBLE DIMMERS

Brand	Model
LUTRON	PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253P-WH, SELV-300P, MACL-153P, RH703PTUTC
COOPER	RRD-6NA-WH, AAL06, SCL03P
LEVITON	6615, IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1


NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.




DIMENSIONS

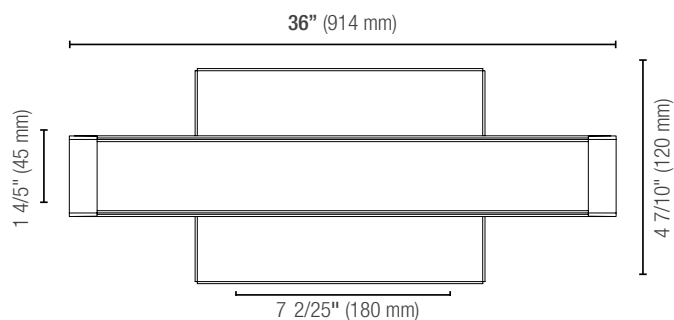PHOTOMETRIC DATA¹

67349 • SVAN/15W/36IN/30K/CH/F/STD • 1 221.1 lm

Polar candela distribution

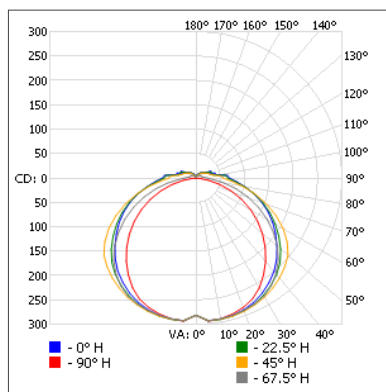

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	241.2	19.7
0-40	407.8	33.4
0-60	773.0	63.3
60-90	331.8	27.2
70-100	219.4	18
90-120	86.6	7.1
0-90	1 104.8	90.5
90-180	116.3	9.5
0-180	1 221.1	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	97.3	8.9'	5.1'
3.3'	25.8	17.4'	10.0'
5.0'	11.2	26.3'	15.1'
6.7'	6.26	35.2'	20.2'
8.3'	4.08	43.6'	25.1'
10'	2.81	52.6'	30.2'

■ Vert. spread: 138.4°
■ Horiz. spread: 112.9°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.