

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WPS GEN 4

CLASSIC WALL PACK

Integrated Photocell

ORDERING INFORMATION

Order code: 68525
Model number: WPS-NS30-W-50K/P127
UPC: 069549017023
DLC unique ID: PLZS3N0EF1Y5
Case quantity: 1

PHYSICAL DATA

Dimensions: 14.37" x 9.33" x 7.36" (365 mm x 237 mm x 187 mm)
Housing material: Aluminium die-cast
Lens Material: Prismatic tempered glass lens
Photocell: Some of the configurations comes with a button type photocell that can be turned off by using the internal switch if needed

PERFORMANCE DATA

Watts (W): 29
Volts (VAC): 120-277
Colour temperature (K)¹: 5 000
Lumen output (lm)²: 4 118
Efficiency (lm/W): 148
CRI: >80
Finish: Bronze
Photocell: Yes
Dimming (Yes/No): Yes
LED current (mA) 230
Power factor: 0.90
THD (%): 20
Operating temp. range: -40°C to 50°C

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

COMPATIBLE ACCESSORIES

Order code	Description
68370	18" Bronze metal backplate
68371	Bronze glareshield
68372	Stainless Steel wireguard



5 yrs
warranty

quick ship

LED fixture

dimmable

wet location

IP 65

ICES 005


IK06

DLC QPL PREMIUM

cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

DIMENSIONS

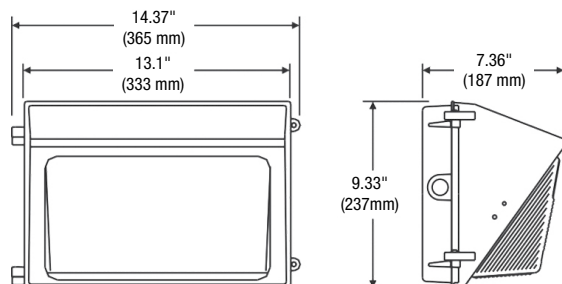

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.