

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# VTL4-L

## 3 CCT SELECT, NEMA4X, NSF VAPOR TIGHT

### ORDERING INFORMATION

**Order code:** 68320  
**Model number:** VTL4-LS4-W/3C  
**UPC:** 69549007727  
**Case quantity:** 1  
**DLC unique ID:** PLW4QC7U0LNS

### PHYSICAL DATA

**Dimensions:** 45.66" x 4.74" (1160 mm x 120 mm)  
**Lens material:** Frosted PC  
**Latch material:** Stainless steel  
**Housing material:** Polycarbonate  
**Mounting:** Surface, suspended

### PERFORMANCE DATA

**Watts (W):** 65  
**Volts (VAC):** 120-277  
**Colour temperature (K)<sup>1</sup>:** 3 CCT (3 500/4 000/5 000)  
**Lumen output (lm)<sup>2</sup>:** 8 450  
**Lumen per Watts (lm/W):** 128  
**CRI:** 80+  
**Life L70 (h)<sup>3</sup>:** >50 000  
**THD (%):** 13.56  
**Power factor:** 0.928  
**Dimming range:** 0-10 V  
**Frequency (Hz):** 50/60  
**Operating temp. range:** -32°C to 40°C (-25°F to 104°F)

<sup>1</sup> Typical colour temperature range: +/- 5 %

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



**5**  
 yrs  
**warranty**

**quick  
 ship**

**LED  
 fixture**

**wet  
 location**

**IP  
 66**

**IK10**

**ICES  
 005**

**3  
 CCT TCC**  
 3500 K / 4000 K / 5000 K

**DLC QPL  
 LISTED  
 PREMIUM**


**ETL  
 LISTED  
 US**

**NSF**

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).


This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

## DIMENSIONS

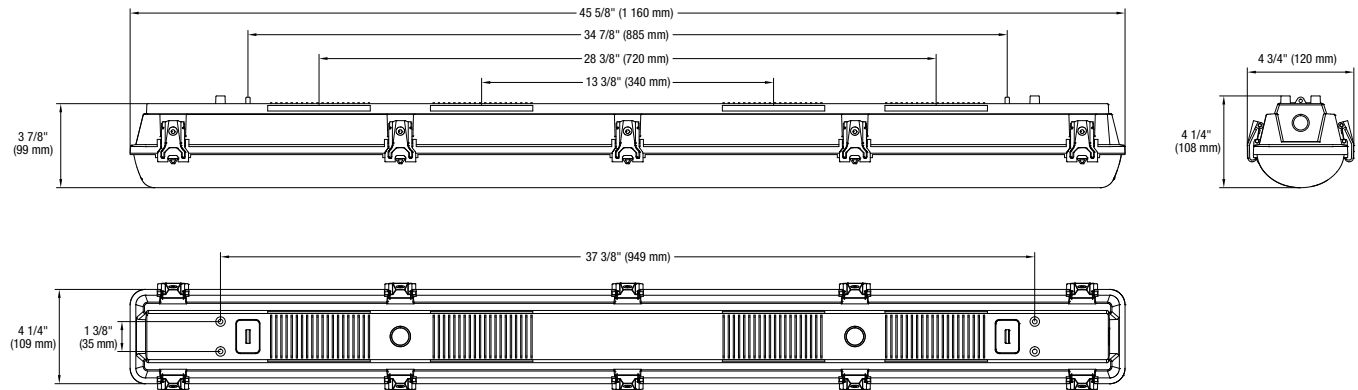PHOTOMETRIC DATA<sup>1</sup>

68320 • VTL4-LS4-W/3C • at 4 000 K • 9 260.3 lm

## Polar candela distribution

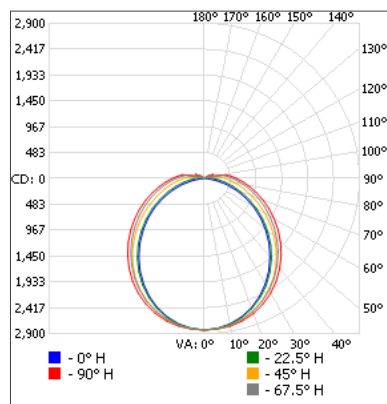

## Zonal lumen summary

Zone	Lumens	% Fixture
0-30	2 188.8	23.6%
0-40	3 577.5	38.6%
0-60	6 342.4	68.5%
60-90	2 378.9	25.7%
70-100	1 603.4	17.3%
90-120	477.1	5.2%
0-90	8 721.3	94.2%
90-180	539.0	5.8%
0-180	9 260.3	100%

## Illuminance at a distance

Center beam fc		Beam width	
4.3'	153 fc	11.0'	16.6'
8.7'	37.4 fc	22.2'	33.6'
13.0'	16.8 fc	33.2'	50.2'
17.3'	9.46 fc	44.2'	66.8'
21.7'	6.01 fc	55.4'	83.7'
26.0'	4.19 fc	66.4'	100.3'

■ Vert. spread: 103.8°  
■ Horiz. spread: 125.2°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
 All products are subject to change or may be discontinued any time without notice.