



# Choice series

STANDARD is proud to introduce its new CHOICE line of LED lamps, focusing on efficiency and value. You will always find the CHOICE in this line!

# LED Lamps

01

- Ballast compatible T8 lamps for a quick and economical solution without any additional wiring needed.
- Quality glass encasing ensures protection against tube yellowing and brittleness.
- Compatible with a variety of electronic instant start, rapid start and program start ballasts.



Order code	Description	System watts (W)			Base	Colour temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)			Case qty (master)
		LBF <sup>1</sup>	NBF <sup>1</sup>	HBF <sup>1</sup>					LBF <sup>1</sup>	NBF <sup>1</sup>	HBF <sup>1</sup>	
<b>T8 - Ballast Compatible</b>												
66989	T8/15W/835/48/CHOICE/STD	16	17	26	G13	3 500	82	50 000	1 600	1 800	2 300	25
66990	T8/15W/840/48/CHOICE/STD	16	17	26	G13	4 000	82	50 000	1 600	1 800	2 350	25
66991	T8/15W/850/48/CHOICE/STD	16	17	26	G13	5 000	82	50 000	1 650	1 850	2 350	25

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers and energy start qualified products, please visit [www.standardpro.com](http://www.standardpro.com)  
<sup>1</sup> LBF= Low ballast factor, NBF= Normal ballast factor, HBF= High ballast factor




DAMP

ENCLOSED  
FIXTUREINSTANT  
ON

NON-DIMMABLE

5  
YEARS  
WARRANTY

c UL US

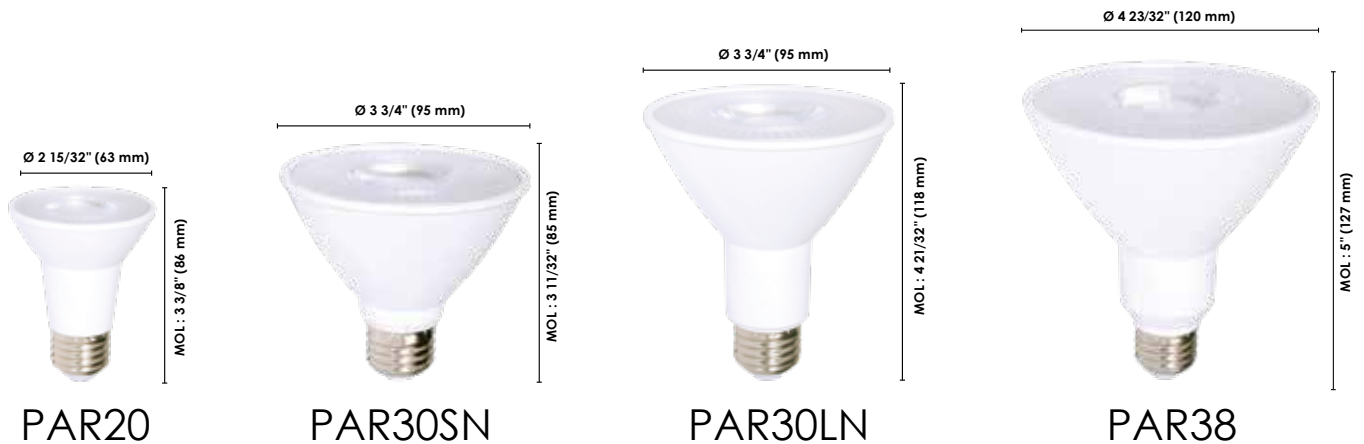

Order code	Description	Watts (W)	Base	Volts (VAC)	Colour temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Beam angle (°)	CBCP (cd)	Traditional equivalent (W)	Case qty (master)
<b>PAR20</b>												
66279 <sup>1</sup>	P20/8W/27K/25/CHOICE/STD	8	E26	120	2 700	≥90	15 000	581	25	1 708	50	12
66280 <sup>1</sup>	P20/8W/27K/40/CHOICE/STD	8	E26	120	2 700	≥90	15 000	572	40	914	50	12
66281 <sup>1</sup>	P20/8W/30K/25/CHOICE/STD	8	E26	120	3 000	≥90	15 000	608	25	1 708	50	12
66282 <sup>1</sup>	P20/8W/30K/40/CHOICE/STD	8	E26	120	3 000	≥90	15 000	605	40	914	50	12
66283 <sup>1</sup>	P20/8W/40K/25/CHOICE/STD	8	E26	120	4 000	≥90	15 000	616	25	1 708	50	12
66284 <sup>1</sup>	P20/8W/40K/40/CHOICE/STD	8	E26	120	4 000	≥90	15 000	652	40	914	50	12
<b>PAR30SN</b>												
66291	P30S/12W/27K/25/CHOICE/STD	12	E26	120	2 700	≥90	15 000	934	25	3 843	75	6
66292	P30S/12W/27K/40/CHOICE/STD	12	E26	120	2 700	≥90	15 000	929	40	1 740	75	6
66293	P30S/12W/30K/25/CHOICE/STD	12	E26	120	3 000	≥90	15 000	965	25	3 843	75	6
66294	P30S/12W/30K/40/CHOICE/STD	12	E26	120	3 000	≥90	15 000	922	40	1 740	75	6
66295	P30S/12W/40K/25/CHOICE/STD	12	E26	120	4 000	≥90	15 000	1 006	25	3 843	75	6
66296	P30S/12W/40K/40/CHOICE/STD	12	E26	120	4 000	≥90	15 000	977	40	1 740	75	6
<b>PAR30LN</b>												
66285	P30L/12W/27K/25/CHOICE/STD	12	E26	120	2 700	≥90	15 000	942	25	4 178	75	6
66286	P30L/12W/27K/40/CHOICE/STD	12	E26	120	2 700	≥90	15 000	935	40	1 813	75	6
66287	P30L/12W/30K/25/CHOICE/STD	12	E26	120	3 000	≥90	15 000	974	25	4 178	75	6
66288	P30L/12W/30K/40/CHOICE/STD	12	E26	120	3 000	≥90	15 000	935	40	1 813	75	6
66289	P30L/12W/40K/25/CHOICE/STD	12	E26	120	4 000	≥90	15 000	1 024	25	4 178	75	6
66290	P30L/12W/40K/40/CHOICE/STD	12	E26	120	4 000	≥90	15 000	996	40	1 813	75	6
<b>PAR38</b>												
66297	P38/16.5W/27K/25/CHOICE/STD	16.5	E26	120	2 700	≥90	15 000	1 360	25	6 067	100	6
66298	P38/16.5W/27K/40/CHOICE/STD	16.5	E26	120	2 700	≥90	15 000	1 398	40	2 527	100	6
66299	P38/16.5W/30K/25/CHOICE/STD	16.5	E26	120	3 000	≥90	15 000	1 419	25	6 067	100	6
66300	P38/16.5W/30K/40/CHOICE/STD	16.5	E26	120	3 000	≥90	15 000	1 355	40	2 527	100	6
66301	P38/16.5W/40K/25/CHOICE/STD	16.5	E26	120	4 000	≥90	15 000	1 548	25	6 067	100	6
66302	P38/16.5W/40K/40/CHOICE/STD	16.5	E26	120	4 000	≥90	15 000	1 510	40	2 527	100	6



DAMP



DIMMABLE



WET



3 YEARS WARRANTY



UL US



ENERGY STAR

Lumen values are derived from photometric testing.  
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)



GU10



MR16

MR16  
E26

A19



A19 4 pack

Order code	Description	Watts (W)	Base	Volts (VAC)	Colour temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Beam angle (°)	CBCP (cd)	Traditional equivalent (W)	Dimming capability (Yes/No)	Case qty (inner/master)
<b>GU10</b>													
66304	GU10/6.5W/27K/40/CHOICE/STD	6.5	GU10	120	2 700	≥80	15 000	500	40	778	50	Yes	1/24
66306	GU10/6.5W/30K/40/CHOICE/STD	6.5	GU10	120	3 000	≥80	15 000	500	40	778	50	Yes	1/24
66308	GU10/6.5W/40K/40/CHOICE/STD	6.5	GU10	120	4 000	≥80	15 000	500	40	778	50	Yes	1/24
<b>MR16</b>													
66309	MR16/12V/6.5W/27K/35/CHOICE/STD	6.5	GU5.3	12	2 700	≥80	25 000	500	35	1 772	50	Yes	1/24
66310	MR16/12V/6.5W/30K/35/CHOICE/STD	6.5	GU5.3	12	3 000	≥80	25 000	500	35	1 772	50	Yes	1/24
66311	MR16/12V/6.5W/40K/35/CHOICE/STD	6.5	GU5.3	12	4 000	≥80	25 000	500	35	1 772	50	Yes	1/24
<b>MR16-E26</b>													
66354	MR16E26/7W/30K/35/CHOICE/STD	7	E26	120	3 000	82	15 000	500	35	1 321	50	Yes	6/48
<b>A19</b>													
66267 <sup>1</sup>	A19/6W/27K/ND/CHOICE/STD	6	E26	120	2 700	≥80	15 000	480	-	-	40	No	6/48
66268 <sup>1</sup>	A19/6W/30K/ND/CHOICE/STD	6	E26	120	3 000	≥80	15 000	480	-	-	40	No	6/48
66269 <sup>1</sup>	A19/9.5W/27K/ND/CHOICE/STD	9.5	E26	120	2 700	≥80	15 000	800	-	-	60	No	6/48
66270 <sup>1</sup>	A19/9.5W/30K/ND/CHOICE/STD	9.5	E26	120	3 000	≥80	15 000	800	-	-	60	No	6/48
<b>A19 4 Pack</b>													
66271 <sup>1</sup>	A19/9.5W/27K/ND/CHOICE/STD 4P	9.5	E26	120	2 700	≥80	15 000	800	-	-	60	No	1/12
66272 <sup>1</sup>	A19/9.5W/30K/ND/CHOICE/STD 4P	9.5	E26	120	3 000	≥80	15 000	800	-	-	60	No	1/12
66273 <sup>1</sup>	A19/9.5W/40K/ND/CHOICE/STD 4P	9.5	E26	120	4 000	≥80	15 000	800	-	-	60	No	1/12
66274 <sup>1</sup>	A19/9.5W/50K/ND/CHOICE/STD 4P	9.5	E26	120	5 000	≥80	15 000	800	-	-	60	No	1/12

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, and energy star qualified products, please visit [www.standardpro.com](http://www.standardpro.com)

