


LED tube replacement lamps offer the perfect alternative for fluorescent lamps while minimizing mercury output, increasing efficiency, ideal for any application.

- Compatible with traditional electronic IS ballasts and program start ballasts
- Glass encasing ensures protection against tube yellowing and brittleness
- Integrated driver for easy installation while allowing the fixture to keep its certification – no additional wiring needed
- Eliminates costly re-lamping charges
- Eliminates the start-up time of traditional fluorescent lamps



Order code	Description	Average System Wattage (W)			Volts (VAC)	Base	Colour temp. (K)	CRI	Average life (hrs)	Initial lumens (lm)			Dimmable (Y/N)	Length in. (mm)		Case qty
		LBF	NBF	HBF	LBF	NBF	HBF			Y	24	(610)				
T8 2 ft																
63631	LED/T8/9W/840/24/STD	10	11	15	120-277/347	G13	4 000	87	50 000	345	1 080	1 370	Y	24	(610)	12
T8 3 ft																
63632	LED/T8/11W/840/36/STD	11	13	17	120-277/347	G13	4 000	82	50 000	1 305	1 500	1 900	Y	36	(915)	25
T8 4 ft																
63638	LED/T8/12W/835/48/STD	13	15	20	120-277/347	G13	3 500	82	50 000	1 520	1 750	2 220	Y	48	(1 220)	25
63633	LED/T8/12W/840/48/STD	13	15	20	120-277/347	G13	4 000	82	50 000	1 560	1 800	2 280	Y	48	(1 220)	25
63634	LED/T8/12W/850/48/STD	13	15	20	120-277/347	G13	5 000	82	50 000	1 590	1 840	2 320	Y	48	(1 220)	25
63635	LED/T8/17W/835/48/STD	17	20	26	120-277/347	G13	3 500	82	50 000	1 930	2 200	2 800	Y	48	(1 220)	25
63636	LED/T8/17W/840/48/STD	17	20	26	120-277/347	G13	4 000	82	50 000	1 990	2 300	2 930	Y	48	(1 220)	25
63637	LED/T8/17W/850/48/STD	17	20	26	120-277/347	G13	5 000	82	50 000	2 050	2 370	3 080	Y	48	(1 220)	25

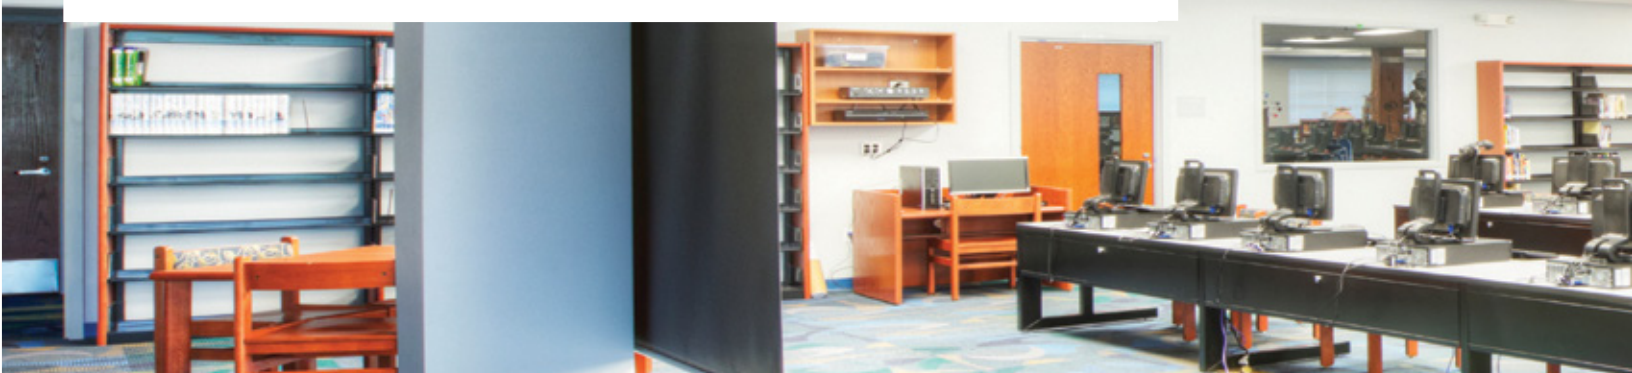

DIMMABLE



INSTANT ON



DAMP



NO MERCURY



COMPLIANT



5 YEARS WARRANTY



UL US



DLC

For a complete list of compatible dimmers and DLC qualified products, please visit www.standardpro.com

T8



- ▶ PTFE coated lamps help contain glass if a lamp is broken
- ▶ Shatterproof to protect employees, production, customers, and your business reputation
- ▶ Food safe
- ▶ Perfect for kitchens, art galleries, museums and schools



Safety Max T8

Order code	Description	Average System Wattage (W)			Volts (VAC)	Base	Colour temp. (K)	CRI	Average life (hrs)	Initial lumens (lm)			Dimmable (Y/N)	Length in. (mm)		Case qty
		LBF	NBF	HBF						LBF	NBF	HBF				

SAFETY MAX T8

Dia. : 1 in. (26 mm)

64071	LED/T8/9W/830/24/STD/SMX	10	11	15	120-277/347	G13	3 000	82	50 000	950	1 070	1 430	Y	24 (610)	25
64072	LED/T8/9W/835/24/STD/SMX	10	11	15	120-277/347	G13	3 500	82	50 000	980	1 110	1 490	Y	24 (610)	25
64073	LED/T8/11W/830/36/STD/SMX	12	14	18	120-277/347	G13	3 000	82	50 000	1 200	1 350	1 810	Y	36 (915)	25
64074	LED/T8/11W/835/36/STD/SMX	12	14	18	120-277/347	G13	3 500	82	50 000	1 240	1 400	1 880	Y	36 (915)	25
64075	LED/T8/12W/830/48/STD/SMX	13	15	20	120-277/347	G13	3 000	86	50 000	1 450	1 630	2 190	Y	48 (1 220)	25
64152	LED/T8/17W/840/48/STD/SMX	15	17	23	120-277	G13	4 000	82	50 000	1 990	2 300	2 930	Y	48 (1 220)	25
64153	LED/T8/17W/850/48/STD/SMX	15	17	23	120-277	G13	5 000	86	50 000	2 050	2 370	3 080	Y	48 (1 220)	25



DIMMABLE



INSTANT ON



DRY



NO MERCURY



COMPLIANT



WARRANTY



UL US



DLC LISTED

For a complete list of compatible dimmers, ballasts and DLC qualified products, please visit www.standardpro.com

Safety Max T8