

LED PANEL LIGHT

LPL22A30
LPL14A30
LPL24A40
07/20

Questions or Concerns Contact At The Following Phone Numbers Before Returning Product To The Store:
1-800-265-1833 (English) / 1-800-567-2513 (French)
Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

SAVE THESE INSTRUCTIONS


TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Gloves



Drill



Scissors



Safety
Goggles

SAFETY PRECAUTIONS:


1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. WIRING SUPPLIES AS REQUIRED BY LOCAL ELECTRICAL CODE.
3. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
4. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
5. WEAR GLOVES AND SAFETY GOGGLES AT ALL TIMES WHEN REMOVING LUMINAIRE FROM CARTON, INSTALLING, SERVICING OR PERFORMING MAINTENANCE.
6. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.

NOTE: Product may not look exactly as shown in pictures.


INSTALLATION OR ASSEMBLY INSTRUCTIONS:

Installation Manual for Back Lit Flat Panels – Three Options


OPTION I. Installation: Recessed

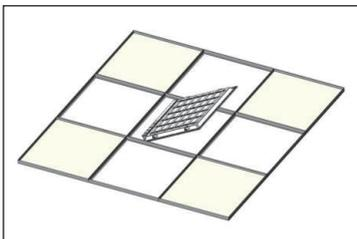


1. Remove the ceiling tile at an appropriate location where the product is to be installed and raise the product above the bar.

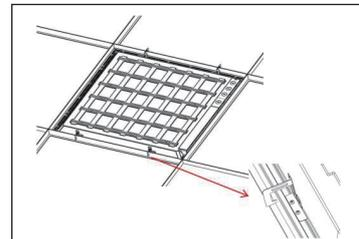

3. Fold the 4 protection brackets so they will be above the T-bar as shown.

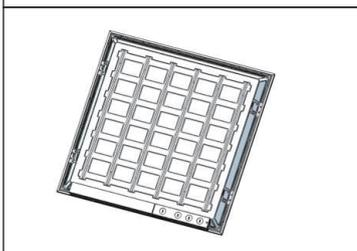


2. With power turned off at the breaker, connect power to driver based on wiring diagram.


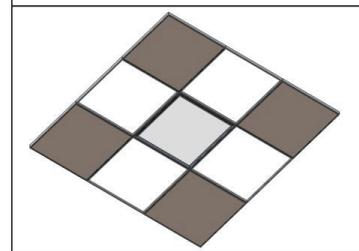


4. Slowly rest the luminaire on the T-bar and make sure it fits appropriately.


Wiring diagram 1

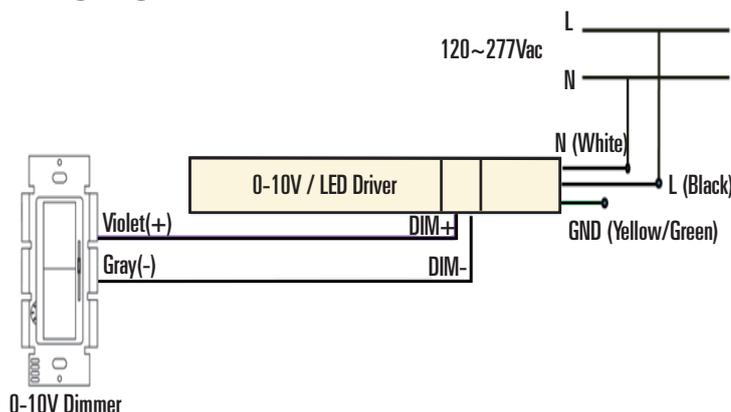


OPTION II. Installation: surface mount (Required components are sold separately)

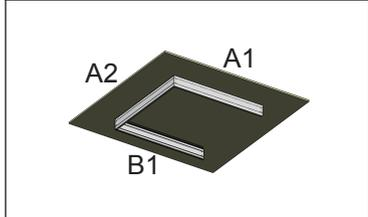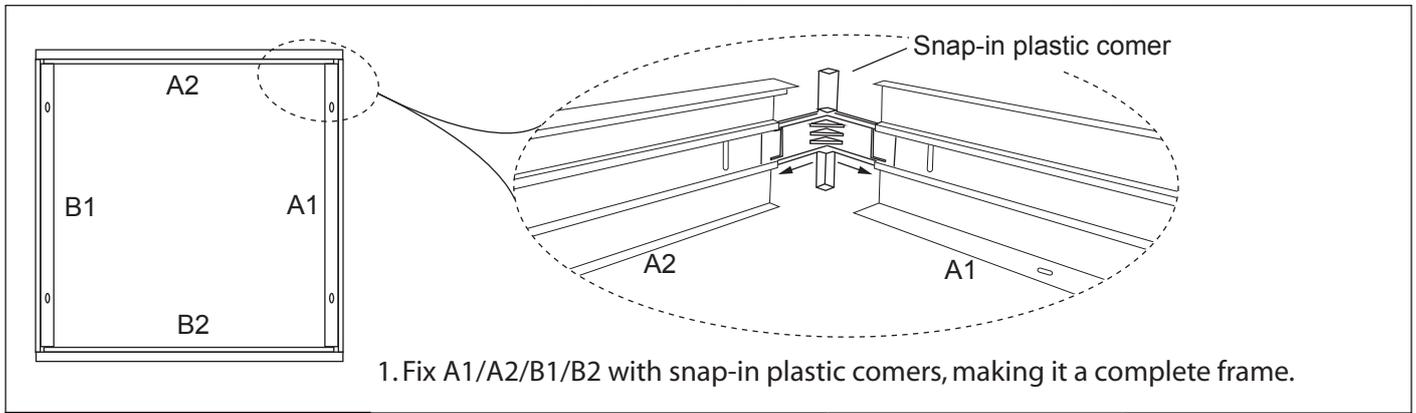


2. Attach the frame to the ceiling with screws (using approved anchors). Remove frame piece B2 as shown in picture 1.

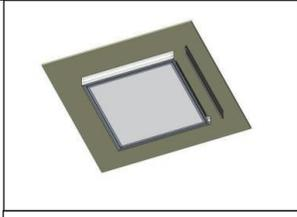

4. Slide luminaire fully into frame as shown.

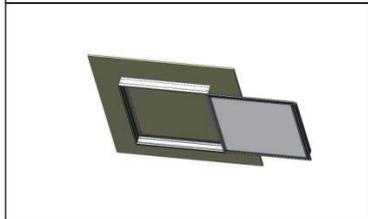


3. Slide luminaire partially into mounting frame as shown. With power turned off at the breaker, connect power to driver based on the wiring diagram.



5. Reinstall B2 as shown in picture 1 above.

OPTION III. The suspending installation (Components are not supplied)

1. Attach the cable to the ceiling using approved hanger for application and attach free end to luminaire using 4 tabs provided on luminaire as shown.

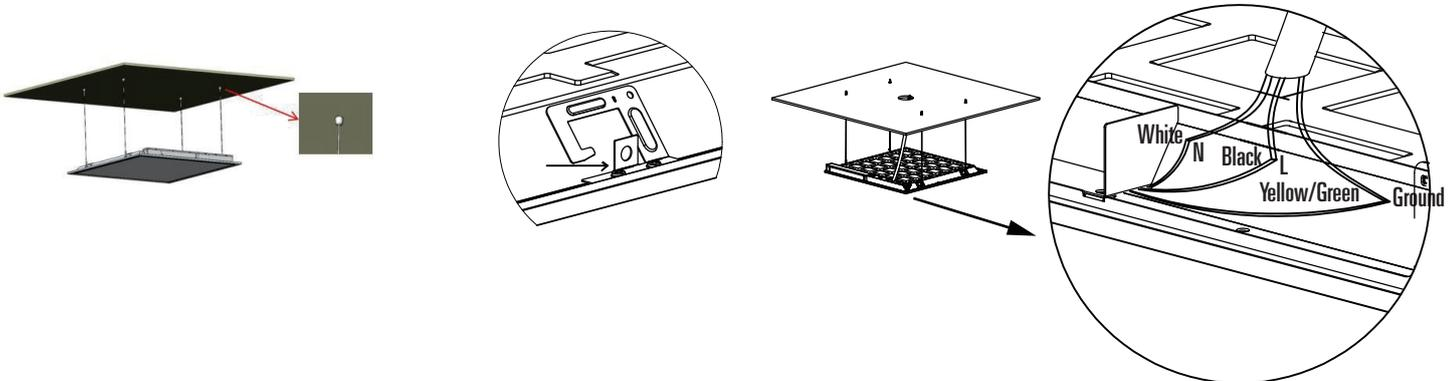

2. With power turned off at the breaker, connect power to driver based on the wiring diagram to complete the installation.

PANNEAU D'ÉCLAIRAGE LED

LPL22A30
LPL14A30
LPL24A40
07/20

Pour Toutes Questions Ou Commentaires, Veuillez Nous Contacter Avant De Retourner Le Produit Au Détaillant :
1-800-265-1833 (Anglais) / 1-800-567-2513 (Français)
Du lundi au vendredi 8 :00am à 5 :00pm E.S.T




INSTRUCTIONS CONCERNANT LE RISQUE
D'INCENDIES OU LES DOMMAGES CORPORELS
LISEZ TOUTES LES INSTRUCTIONS

INSTRUCTIONS DE SÛRETÉ IMPORTANTES

GARDEZ CES INSTRUCTIONS

OUTILS ET MATERIAUX REQUIS:



MISE EN GARDE:


1. FERMEZ LE COURANT AU DISJONCTEUR AVANT DE DEBUTER L'INSTALLATION DE LA FIXTURE.
2. FOURNITURES ÉLECTRIQUES TELLES QUE PRESCRITES PAR LES NORMES LOCALES.
3. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.
4. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUAT.
5. PORTER DES GANTS ET DES LUNETTES DE SÉCURITÉ EN TOUT TEMPS LORSQUE VOUS SORTEZ LE LUMINAIRE DE SON EMBALLAGE, QUE VOUS L'INSTALLEZ OU FAÏTES L'ENTRETIEN.
6. POUR NETTOYER LE LUMINAIRE, L'ÉTEINDRE, ATTENDRE QU'IL SOIT FROID, PUIS LE NETTOYER AVEC LINGE PROPRE ET DOUX.

Note : Le produit peut différer de l'image.


INSTRUCTIONS D'INSTALLATION:

Manuel d'installation des panneaux plats rétro-éclairés - Trois options


OPTION I. Installation: Encastré

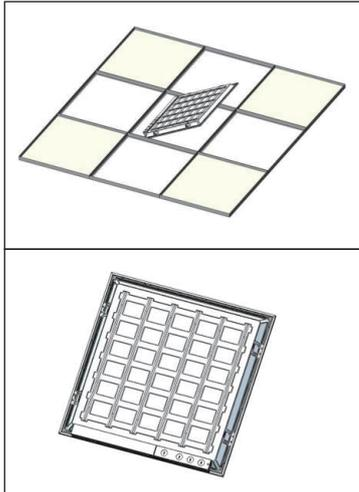


1. Retirez la dalle de plafond à un endroit approprié où le produit doit être installé et soulevez le produit au-dessus de la barre.

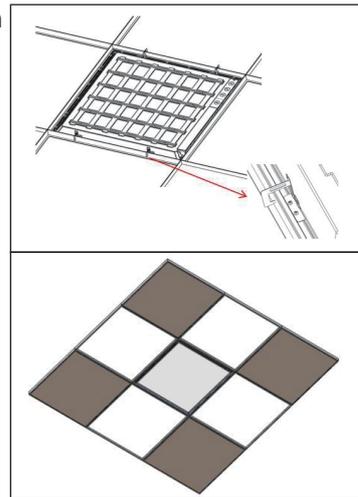

3. Pliez les 4 supports de protection pour qu'ils soient au-dessus de la barre en T, comme illustré.

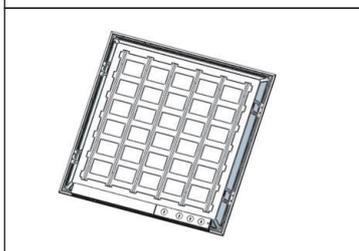


2. L'alimentation étant coupée au disjoncteur, connectez l'alimentation au pilote en fonction du schéma de câblage.


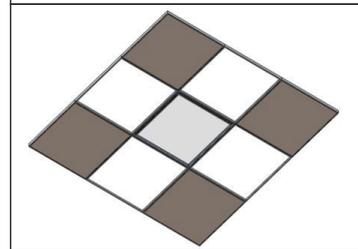


4. Posez lentement le luminaire sur la barre en T et assurez-vous qu'il s'adapte correctement.

Schéma de câblage 1

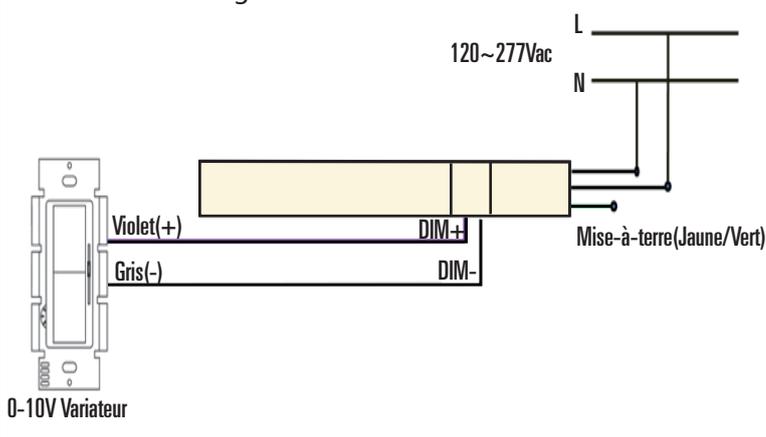


OPTION II. Installation: montage en surface (Composantes requises sont vendues séparément)

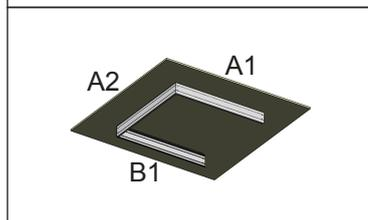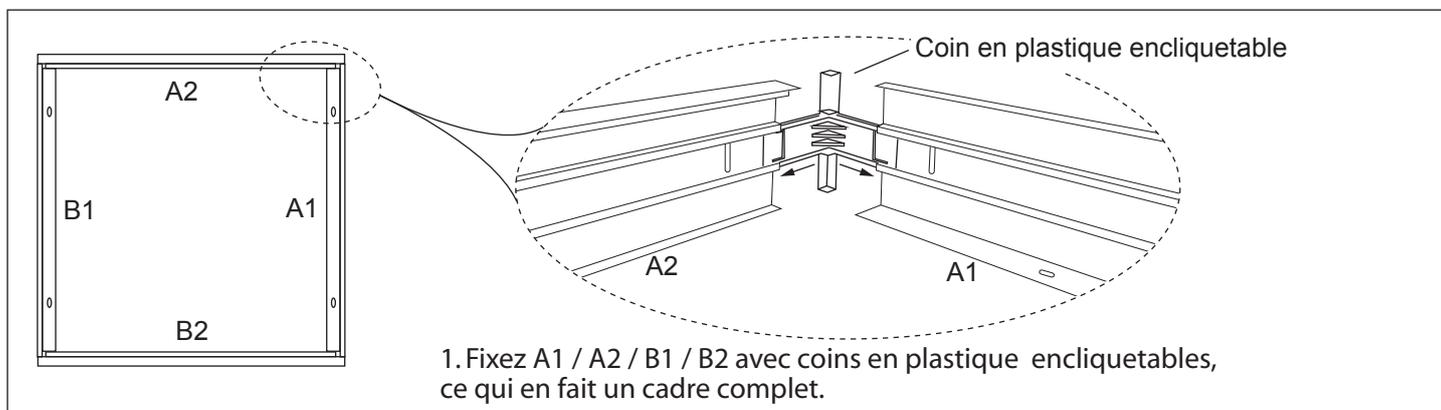


2. Fixez le cadrage au plafond avec des vis (en utilisant des ancrages approuvés). Retirez la pièce de cadre B2 comme indiqué sur l'image 1.



4. Glissez le luminaire complètement tel qu'indiqué

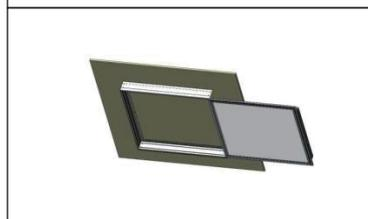


3. Glissez le luminaire partiellement dans cadrage de montage tel qu'indiqué. L'alimentation étant coupée au niveau du disjoncteur, connectez l'alimentation au pilote en fonction du schéma de câblage.



5. Réinstallez B2 tel que montré dans l'image 1 ci-haut.

OPTION III. Installation: la suspension (Les composantes ne sont pas fournies)

1. Fixez le câble au plafond à l'aide d'un support approuvé pour l'application et fixez l'extrémité libre au luminaire à l'aide des 4 languettes fournies sur le luminaire, comme illustré.

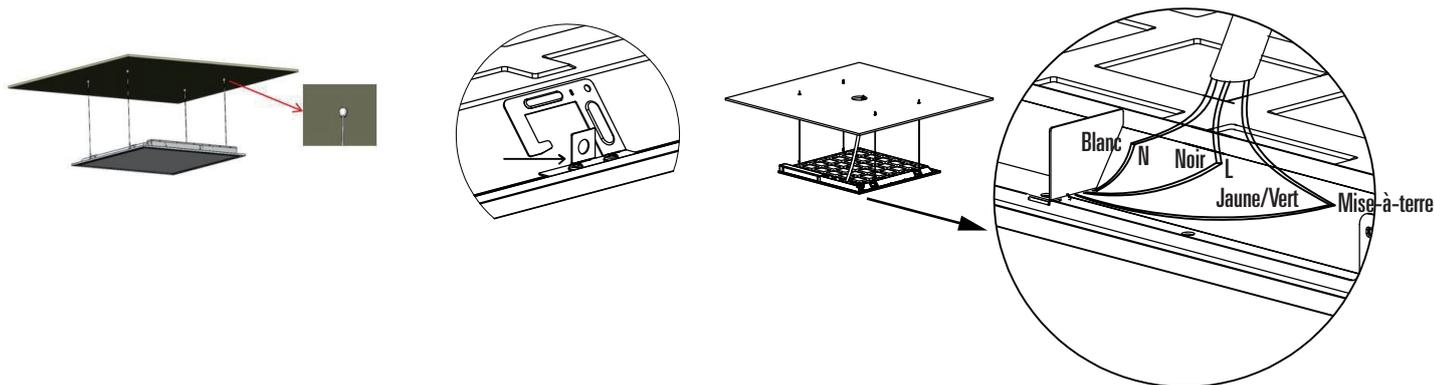

2. L'alimentation étant coupée au disjoncteur, connectez l'alimentation au pilote en fonction du schéma de câblage pour terminer l'installation.