

Technical Information Bulletin

LED Lamps



Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION


Order code: 66766
Description: G16.5/S2/5W/27K/E12/CL/STD
UPC: 69549667662
Case quantity: 24 / 48

PERFORMANCE DATA

Shape: G16.5
Base: E12
Watts(W): 5
Volts (VAC): 120
Colour temperature (K)**: 2 700
Average life (L70 hours): 15 000
Initial lumens (lm)*: 365
Initial lumens per watt (lm/W): 73
CRI: 82
Beam angle: 260
Power factor: 0.98
Operating temperature range: -20 °C to 45 °C (-4 °F to 113 °F)

*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 5 %

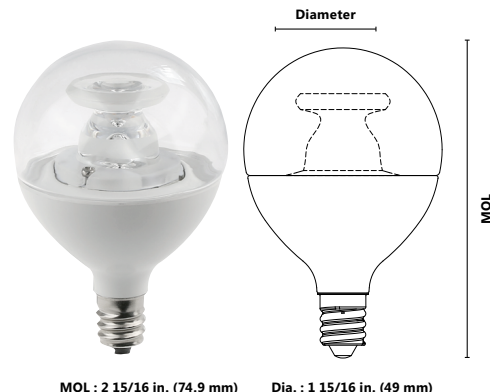

MOL : 2 15/16 in. (74.9 mm)

Dia. : 1 15/16 in. (49 mm)

DIMMER COMPATIBILITY

Legrand HCL453P, RH703PTUTC
Cooper AAL06, DAL06P, SLC03P
Leviton DSL06-1LZ, DSM10-1LZ, IPL06
Lutron AYCL-253P, CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, MACL-153P



CAUTIONS

Turn power off before inspection, installation, or removal.

- Risk of electric shock – do not use where directly exposed to water or weather.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free-standing portable luminaire. Use only with a portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- For complete dimmer and warranty information visit www.standardpro.com.
- 3 Years Limited Warranty.
- Operating temperature: -20°C to 45°C (-4°F to 113°F)

| Qty | Description | Price |
|-----|-------------|-------|
| | | |

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

