



Date:

2/21/2004

Sink Faucet Deckmount

8" Deck-Two Handle

Model No: 26T2933


COMPLIES WITH:

- CSA certified.
- Complies to ANSI/ASME Standard A112.18.1M.
- Lever Blade Handles No. 3, 4 and 5 ADA compliant and meet Handicapped Accessibility Standard ANSI 117.1 of less than 5 lbs operating force.
- IAPMO listed
- UL Listed to U.S. and Canadian Safety Standards and classified in accordance with ANSI/NSF61-97b 21PL
- (Contact Delta Representative for State and/or Local Approvals.)

SPECIFICATION:

- 203 mm (8") center deckmount faucet
- two handle
- cast brass underbody
- chrome plated stainless steel coverplate
- polished chrome plated finish
- Tuf-Teck compression structures
- 90% flow with first 1/4 turn of operation
- positive shutoff even in poor water conditions
- Spout#: 9 - VR Gooseneck-6.0" radius-10.4" height(unmounted)-rigid/swivel-Vandal resistant(VR).090" wall thickness-(R4)
- Outlet#: 3 - VR Aerator-2.1 GPM (8 L/min)- Vandal Resistant(VR)
- Handle#: 3 - VR 70 mm (2-3/4") Lever Blade Handles-ADA Compliant-Metal-Color indexed-Vandal Resistant(VR) screws

(Dimensional drawing on following page)

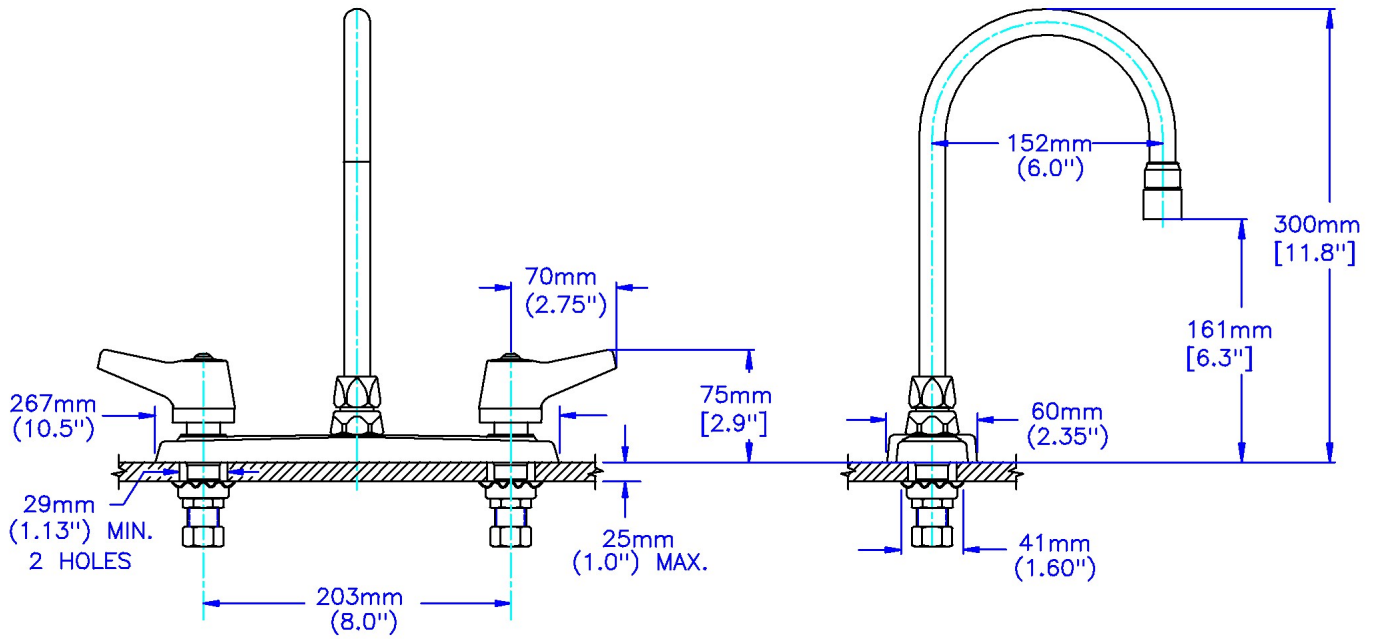

INLET FOR 3/8" OR 1/2" FLEXIBLE RISER
OR 1/2-14 NPSM COUPLING NUT (SUPPLIED)