



COMPACT CADET® 3 ELONGATED RIGHT HEIGHT ONE-PIECE TOILET

VITREOUS CHINA

**COMPACT CADET® 3 ELONGATED
RIGHT HEIGHT ONE-PIECE TOILET**


2403 012

- Vitreous china
- Low-consumption (6.0 Lpf/1.3 gpf)
- EverClean™ anti-microbial surface which inhibits the growth of stain and odor causing bacteria, mold and mildew
- Featuring the **Cadet®3 Flushing System**
- Elongated siphon jet action bowl
- 54mm (2-1/8") fully-glazed trapway
- Rim height at 419mm (16-1/2")
- Space saving compact design - Elongated Right Height bowl fits in same space as a round front toilet
- Includes EverClean™ Anti-Microbial Slow Close Seat
- Oversized 76mm (3") Flush Valve with Chemical Resistant Flapper
- Chrome trip lever
- 100% factory flush tested
- 2 bolt caps
- 5 year warranty

Nominal Dimensions:

724 x 419 x 724mm

(28-1/2" x 16-1/2" x 28-1/2")

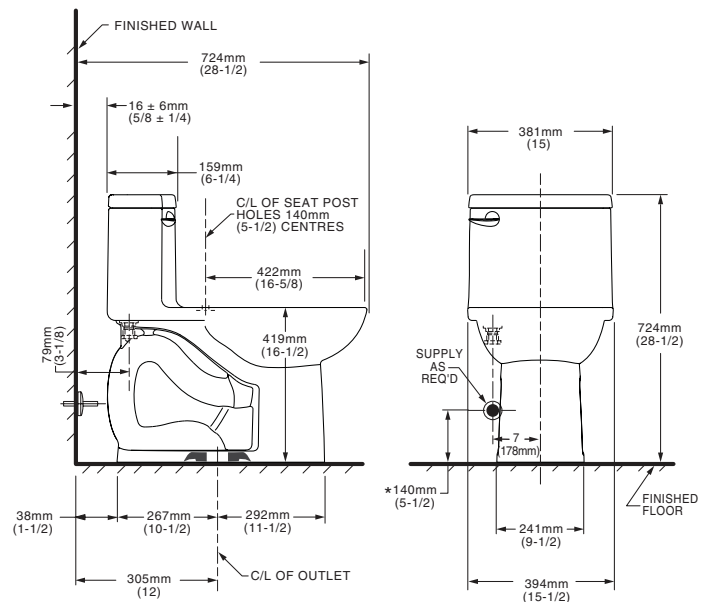

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- CAN/CSA B45 series

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Linen
☐ Silver Gray ☐ Black
- ☐ Supply with stop:



- When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor.

MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.

SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

CADET® 3

Flushing System